



X2

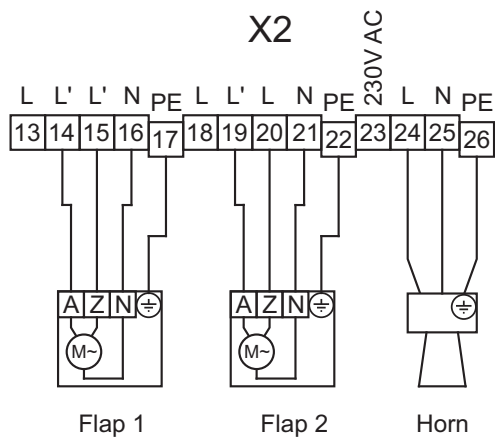


X3

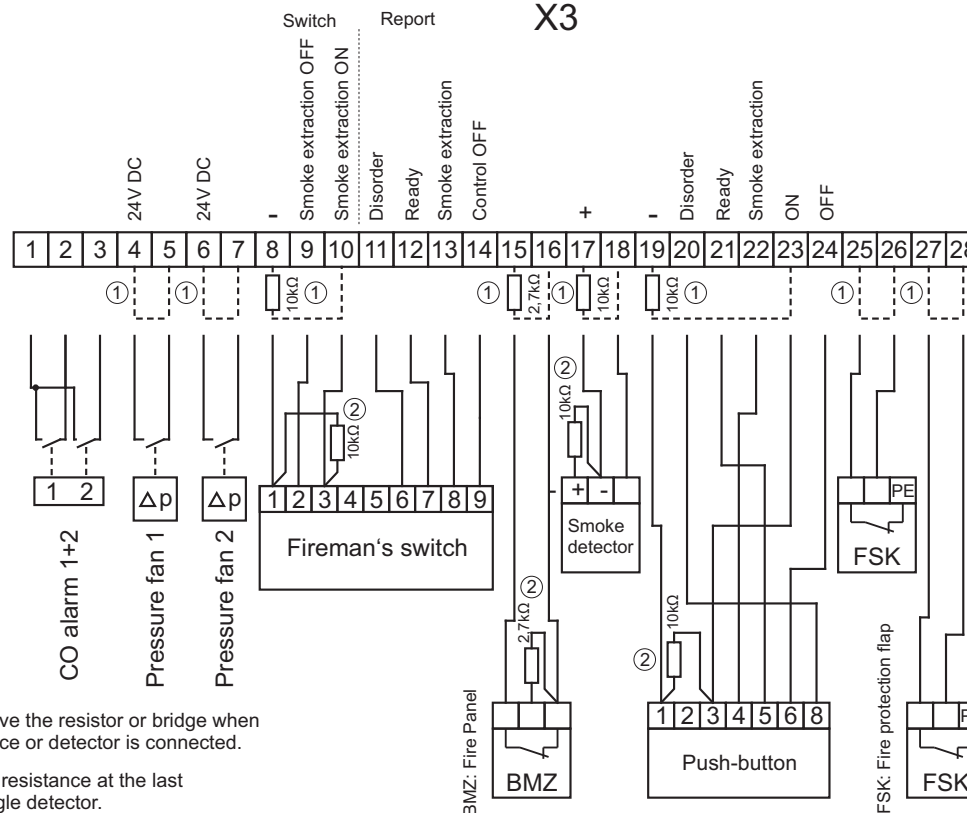

- ① Remove the resistor or bridge when a device or detector is connected.
- ② Insert resistance at the last or single detector.

X5

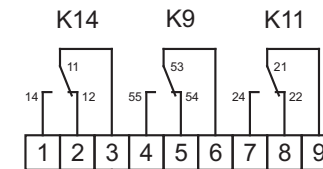

X2 / 23
Bridge, if fault message should be 230V

K14: Collective fault message

K9: Collective fault message EVS

K11: Operation Smoke extraction

