


D E F

*Potentiometer min.
rotational speed


*potentiomètre
réglage de la
vitesse mini

PU/A 10 Art.Nr. 1734/1735

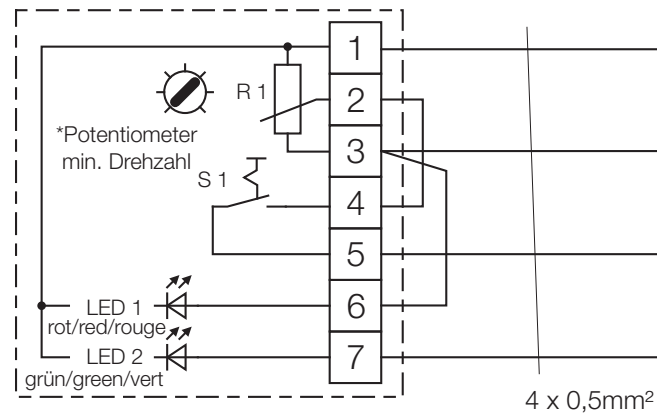


EC-Motor/moteur EC

MBD EC 280
SS-988

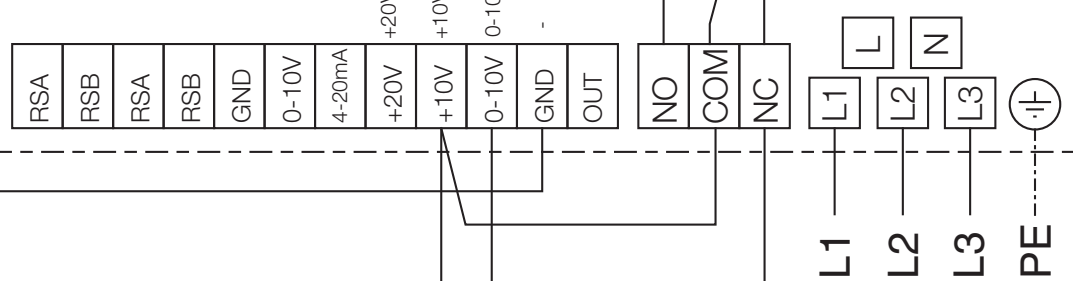

PU/A 10 Art.Nr. 1734/1735

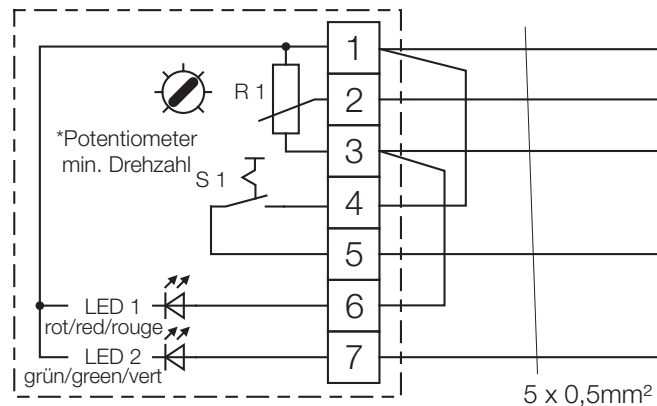


Freigabe inaktiv: Din 1 auf GND
Release inactive: Din 1 on GND
Autorisation inactive: Din 1 sur GND

LED Anzeige Logik				
Klemme 6	10V/24V	10V/24V	0V	0V
Klemme 7	0V	10V/24V	10V/24V	0V
LED Anzeige	rot (1)	grün (2)	—	—

LED display logic				
terminal 6	10V/24V	10V/24V	0V	0V
terminal 7	0V	10V/24V	10V/24V	0V
LED display	red (1)	green (2)	—	—

LED indicateur logique				
borne 6	10V/24V	10V/24V	0V	0V
borne 7	0V	10V/24V	10V/24V	0V
LED indicateur	rouge (1)	vert (2)	—	—

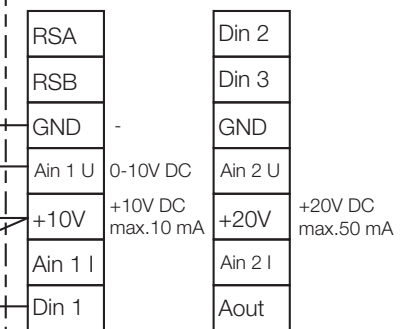

EC-Motor
moteur EC

MBD EC 315
MBD EC 355
MBD EC 400
SS-988