


AIR1-JVK XC / XVP



Dimensions AIR1-JVK XC / XVP

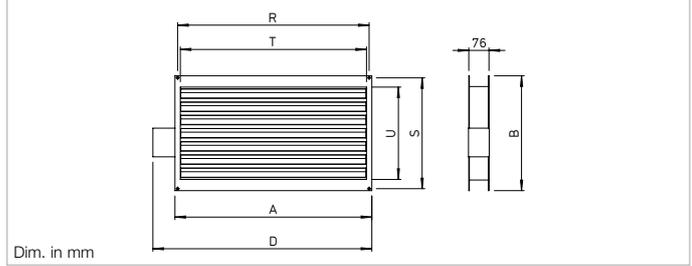

■ **Multi-leaf damper external**

Multi-leaf damper for preventing cold draughts when the fan is stationary. Framework casing with connection flange on both sides. Counter-rotating blades, with retracted sealing lip. Sealing class 2. Installation on outside of unit.

■ **Technical data**

Type	Ref. no.	Runtime (open / closed)	Weight	Ambient temperature	Protection class	Actuator type
AIR1-JVK XC 500	05421	75 s	1.6 kg	-30 to +50 °C	IP42	24 V DC. spring return
AIR1-JVK XC 700	05841	75 s	2.6 kg	-30 to +50 °C	IP42	24 V DC. spring return
AIR1-JVK XC 1000	40749	75 s	3.5 kg	-30 to +50 °C	IP42	24 V DC. spring return
AIR1-JVK XC 1400	05856	75 s	3.9 kg	-30 to +50 °C	IP42	24 V DC. spring return
AIR1-JVK XC 2200/XVP 2500	06000	75 s	4.5 kg	-30 to +50 °C	IP42	24 V DC. spring return
AIR1-JVK XC 3200/XVP 3500	06003	75 s	7.9 kg	-30 to +50 °C	IP42	24 V DC. spring return

■ **Dimensions**

Type	Ref. no.	A	B	D	R	S	T	U
AIR1-JVK XC 500	05421	340	185	432	320	170	300	100
AIR1-JVK XC 700	05841	440	235	523	420	220	400	150
AIR1-JVK XC 1000	40749	540	235	623	520	220	500	150
AIR1-JVK XC 1400	05856	540	285	623	520	270	500	200
AIR1-JVK XC 2200/XVP 2500	06000	540	335	623	520	320	500	250
AIR1-JVK XC 3200/XVP 3500	06003	740	435	823	720	420	700	350

AIR1-JVK XH / RH



■ **Multi-leaf damper internal**

Multi-leaf damper for preventing cold draughts when the fan is stationary. Framework casing with connection flange on both sides. Counter-rotating blades, with retracted sealing lip. Sealing class 2. Installation inside of unit.

■ **Technical data**

Type	Ref. no.	Runtime (open / closed)	Weight	Ambient temperature	Actuator type
AIR1-JVK RH 1500	06006	40 ... 75 s	3.0 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK RH 2000	06007	40 ... 75 s	4.0 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK XH 3500-4500/RH 3000	06009	40 ... 75 s	5.0 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK XH 5500/RH 5000-6000	06010	40 ... 75 s	6.6 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK XH 7000/RH 8000	06012	40 ... 75 s	7.8 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK XH 8500/RH 9500	06013	40 ... 75 s	8.6 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK RH 12000	06020	40 ... 75 s	10.0 kg	-30 to +50 °C	24 V DC. spring return
AIR1-JVK RH 15000	06021	40 ... 75 s	13.0 kg	-30 to +50 °C	24 V DC. spring return