


KV 355



Also available in version:



Dimensions KV 355

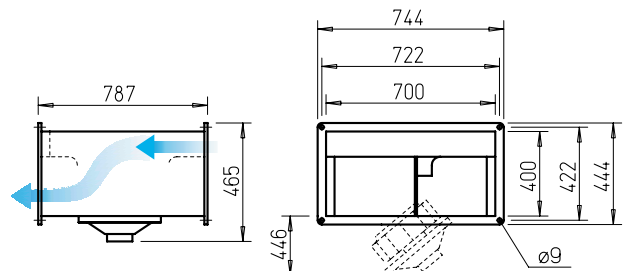

Dim. in mm

Centrifugal rectangular duct fans with forward curved impeller blades. Retractable motor-impeller unit.

- Low-noise impeller in optimised volute casing for high delivery pressures.
- Compact, flat design for versatile use in extract air and intake air systems in commercial and industrial buildings.

Description

■ **Casing**

Double-sided standardised rectangular duct flange profiles, made of galvanised steel sheet, space-saving design.

- Particularly easy to service (cleaning) due to retractable motor-impeller unit.

■ **Impeller**

Forward curved impeller made of galvanised steel, good level of efficiency, low noise, aerodynamically optimised volute casing; inlet via nozzle.

■ **Drive**

Through maintenance-free external rotor motor on which the impeller is mounted. Closed design, IP44. Winding with moisture proof coating. Ball bearing mounted, radio interference-free. Dynamic balancing and flexible motor mount for low-vibration and low-noise operation.

■ **Electrical connection**

Terminal box (IP55 for 3~ or IP65 for explosion-proof types) mounted to external cable.

■ **Motor protection**

Through built-in thermal contacts which must be connected to a motor protection circuit breaker.

■ **Power control**

Possible through voltage reduction by means of 5-step transformer or electronic (continuously variable) controller. The performances at corresponding voltages are shown in the performance diagram.

■ **Noise**

The total level and range are specified above the performance diagram for:

- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power

The inlet side sound power level is also specified above the control voltages in the performance diagram.

- The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

■ **Installation**

Installation possible in any position. Note accessibility/swivelling range.

■ **Explosion-proof design**

Thermal motor protection through integrated PTC thermistors which must be connected to a tripping unit MSA. Also approved for speed control, whereby the minimum voltage of 100 V must be respected.


■ **Reference**

Page


Selection table	437
Techn. description	436
Planning information	14 ff.
Modular system	434

Type	Ref. no.	Flow rate max.	Rated speed	Sound press. case-radiation	Power consumption		Wiring diagram	Max. air flow temperature at		Wgt net aprx.	Speed controller 5-step				Motor protection circuit breaker for connection of built-in thermal contacts	
					kW	A		Rat. vol.	Control		kg	without motor prot. circ. brea.	with motor prot. circ. brea.	Type	Ref. no.	Type
		V m³/h	min⁻¹	dB(A) in 4 m			No.	+ °C	+ °C		Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP44																
KVD 355/6/70/40	05688	5000	830	42	1.53	5.5/3.2	0860	60	60	54	TSD 5.5	01503	RDS 4	01316	MD	05849
Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 230/400 V, 50 Hz, protection category IP44																
KVD 355/6/70/40 Ex	06814	4800	800	48	1.40	2.4	0899	40	40	49	TSD 3.0	01502	—	—	MSA	01289

Performance curves KVD 355/6/70/40

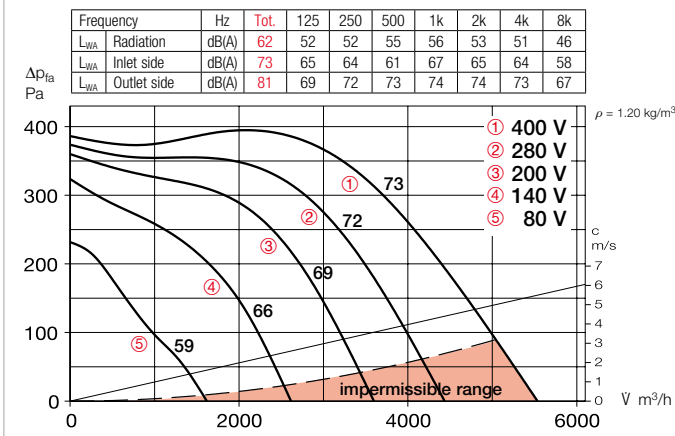

Performance curves KVD 355/6/70/40 Ex

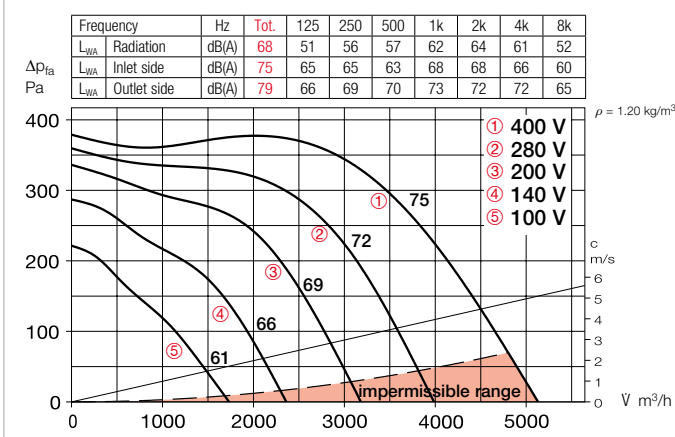

Accessories

External wall shutter

VK 70/40 Ref. no. 00879
 Automatic overpressure shutter made of light grey plastic.



Weather protection grille

WSG 70/40 No. 00114
 Stable construction made of extruded aluminium profiles, natural colour anodised.



Multi-leaf damper for rectangular duct installation

JVK 70/40 Ref. no. 06915
 Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.



Fitting

FSK 70/40 Ref. no. 00840
 For cost-effective integration of rectangular duct fans in round duct systems with Ø 400 mm.



Flexible connector

VS 70/40 Ref. no. 05699
 Flexible rectangular duct connector with double-sided flange frame.
– for explosion-proof fans
VS 70/40 Ex No. 00269



Counter flange

GF 70/40 Ref. no. 06924
 Flange frame made of galvanised steel sheet for connection to the rectangular duct.



Rectangular duct silencer

KSD 70/40 Ref. no. 08731
 For outlet and inlet side insertion in the rectangular duct system.



Rectangular duct air filter

KLF 70/40 Coarse 70%* 08723
KLF 70/40 ePM1 50%* 08647
 With large bag filter. Galvanised steel sheet casing with double-sided flanges.



Warm water heating element

WHR 2/70/40 No. 08788
WHR 4/70/40 No. 08789
 For installation in rectangular duct system.



Temperature control system for warm water heating element

WHS HE¹⁾ Ref. no. 08319

¹⁾ With heat output reduced to 2200 l/h for Type WHR 4/70/40.



* See product page 477 for detailed description.

Accessory details Page

Shutters and weather prot. grille	480, 561 ff.
Filters, heating elements and silencers	481 ff.
Temperature control systems for heating elements	487, 492 f.
Speed controllers and motor protection circuit breakers	599 ff.