

HQ EC 355




HW EC 355




HRF EC 355




Dimensions HQ EC 355



Dimensions HW EC 355



Dimensions HRF EC 355



Description for all types

■ **Casing**

Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white.

■ **Impeller**

High performance characteristics with profiled blades made of plastic, aerodynamically optimised for application, dynamically balanced.

■ **Drive**

Energy-saving, speed-control-lable external rotor EC motor in protection category IP54 with the highest level of efficiency. Maintenance-free and radio interference-free, excellent electromagnetic compatibility (EMC), ball bearing mounted.

■ **Motor protection**

Integrated electronic temperature monitoring system for EC motor and electronics.

■ **Electrical connection**

Standard terminal box (protection category IP54). Mounted to external cable for HQ and HW types (version "A") or on back of motor (version "B"). Mounted on outside of duct for HRF types.

■ **Protection grille**

Made of powder-coated steel for HQ and HW in accordance with DIN EN ISO 13857.

■ **Power control**

All types are continuously controllable via internal (delivery) or external speed potentiometer. Control is also possible via three level switch or continuously variable via universal control system or electronic differential pressure/temperature controller. See type table. Performance levels are shown on the performance curve as examples.

■ **Installation**


Installation possible in any position.

■ **Noise levels**


The total level and range for the sound power level and sound pressure level at 4 m free field conditions are specified above the performance diagram for the average operating point on the inlet/outlet side. The total sound pressure level at 4 m (free field conditions) is also specified in the type table, as well as the table below the performance diagram for various voltages. See page 14 f for noise emissions and room acoustics.

Speed	Flow rate-free-blowing	Power consump.	Current consum.	Sound pressure	Wiring diagram	Max. air flow temperature	Wgt net	Design type											
								HQ EC		Ref. no.		HW EC		Ref. no.		HRF EC		Ref. no.	
min ⁻¹	ℳ m³/h	kW	A	dB(A) at 4m	No.	+°C	ca. kg	incl. protection grille				incl. protection grille				HRF EC			
Alternating current, 1~, 230 Volt, 50/60 Hz, EC motor, protection category IP54																			
1460	3000	0.12	1.10	49	1252	40	8.5	HQW EC 355 A 04916				HWW EC 355 A 04917				HRFW EC 355 A 04918			
1980	4200	0.32	1.40	59	1047	40	12.0	HOW EC 355 B 04919				HWW EC 355 B 04920				HRFW EC 355 B 04921			


Performance curves HQ EC / HW EC / HRF EC 355 A

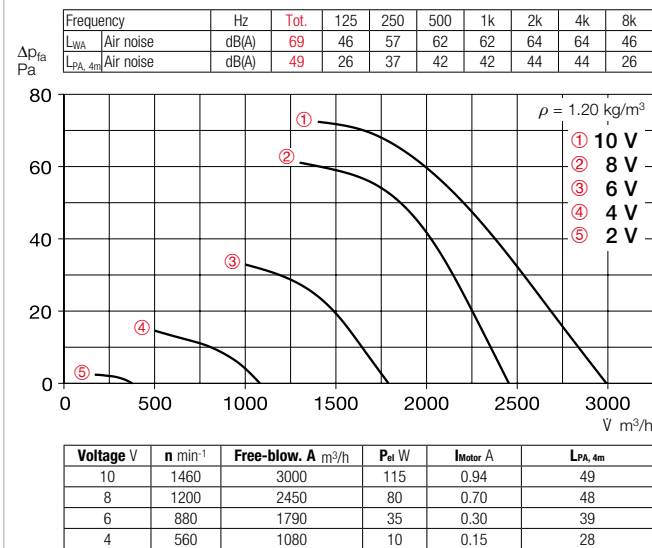

Performance curves HQ EC / HW EC / HRF EC 355 B

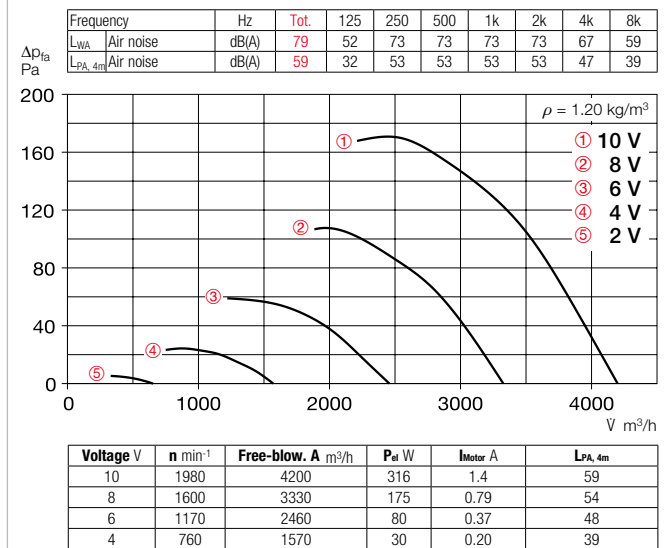

Accessories for HRF EC 355 Description see page 280 ff.

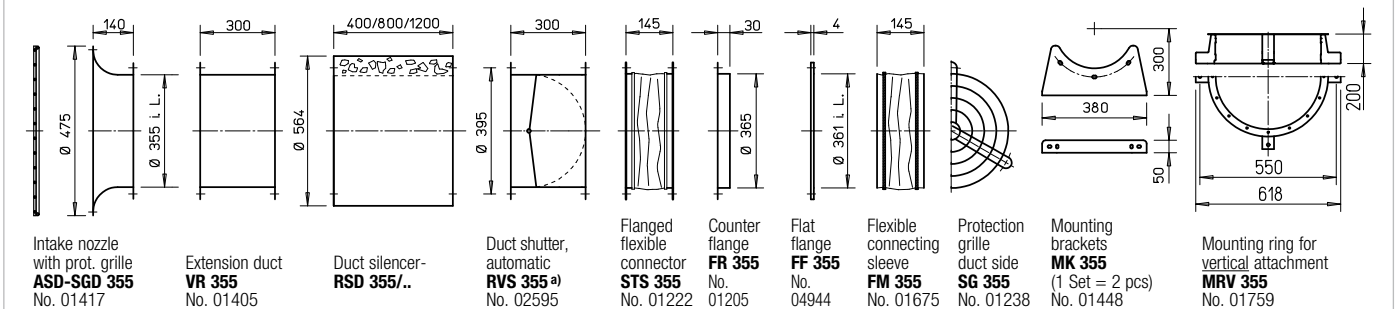

a) Shutter, motorised see Accessories product pages.

References	Page
Techn. description	190
Selection table	191
Planning information	14 ff.

Special design

Different voltage, air flow direction, higher air flow temperature, acid protection upon request.

The technical information on p.19 ff. must be observed.

Other accessories	Page
Filters and silencers	485 ff.
Shutters and ventilation grilles	565 ff.
Universal control system, electronic controller, Speed potentiometer	617 ff.
Five-step speed switch	620

Universal control system		Speed potentiometer		Three level speed switch		Electronic pressure difference controller/ actuator		Electronic temperature controller/actuator	
Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
EUR EC ¹⁾	01347	PU 10 ¹⁾	01734	PA 10 ¹⁾	01735	SU-3 10 ¹⁾	04266	SA-3 10 ¹⁾	04267
EUR EC ¹⁾	01347	PU 10 ¹⁾	01734	PA 10 ¹⁾	01735	SU-3 10 ¹⁾	04266	SA-3 10 ¹⁾	04267
						EDR ¹⁾	01437	ETR ¹⁾	01438
						EDR ¹⁾	01437	ETR ¹⁾	01438

¹⁾ Multiple EC fans can normally be connected, see Accessories.