


VAR 400



Also available in version:

Dimensions VAR 400

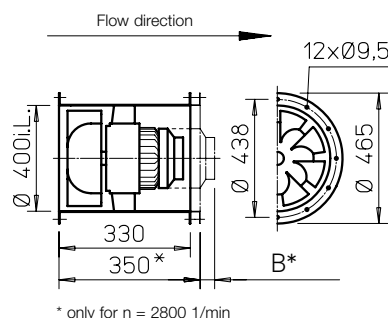

* only for n = 2800 1/min

Dim. B see table
Dim. in mm

■ Casing

Duct with double-sided flange DIN 24155 p. 3. Made of galvanised steel sheet, fixed guide wheel with inner hub for mounting the flange motor. Types with $n = 2800 \text{ min}^{-1}$ welded casing, hot-dip galvanised.

■ Impeller

Optimised for high pressure and volume performance. Special development with spatially curved blades made of hot-dip galvanised steel.

■ Drive

Directly through maintenance-free flange motor. Closed design type IP54. Aluminium or grey cast iron casing with cooling fins. Radio interference-free, sealed ball bearings. Tropicalised winding with moisture proof coating. With condensate drain holes upon request (except for explosion-proof types), and the installation method must be indicated when placing the order.

■ Power control

The voltage-controllable types are identified in the "Current consumption with control mode" column with a value which must be observed when determining the controller (see Speed controller column). The flow rates are shown in the performance diagram. The planned use of a frequency inverter without a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. Explosion-proof types are not controllable.

■ Electrical connection

Standard terminal box (protection category IP55) on outside of duct.

■ Installation

Installation possible in any position; but be aware of any condensate drain holes depending on usage.

■ Motor protection

All types (except for explosion-proof models and type VARD 400/4/2) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection. Motors without thermal contacts must be protected by means of on-site a motor protection circuit breaker.

■ Noise levels

See sound power information above performance diagram. The lower sound pressure value can be determined using the diagram on the "Technical information" page. See page 14 f for noise emissions and room acoustics.

■ Reference

	Page
Techn. description	258
Selection table	259
Planning information	14 ff.

■ Special design

Different voltage, frequency, protection category, higher air flow temperature and acid protection upon request.

The technical information on p. 19 ff. must be observed.

Type	Ref. no.	Speed	Flow rate free-blow	Power consump.*	Voltage	Current consumption*		Wiring diagram	Max. air flow temp.		Weight net	Dim. B Motor protrusion	Speed controller 5-step Pole chang. switch		Motor protection circuit breaker for connecting built-in thermal contacts		Vibration dampers	
						at rated voltage	with control		at rated voltage	with control			Type	Ref. no.	Type	No.	Compr.	Tens.
		min ⁻¹	m ³ /h	kW	V	A	A	No.	+°C	+°C	ca. kg	mm						
Single-phase alternating current, 50 Hz, protection category IP54																		
VARW 400/4	06688	1375	5130	0.70	230	3.00	3.35	967	60	40	22.5	—	MWS 5 ¹⁾	01949	MW	01579	SDD 1	SDZ 1
Three-phase current, 50 Hz, protection category IP54																		
VARD 400/4	06690	1400	5240	0.72	400	1.95	2.00	469	60	40	22.5	—	RDS 4 ^{1) 2)}	01316	MD	05849	SDD 1	SDZ 1
Two-speed, three-phase current, 50 Hz, Y/Δ connection, protection category IP54																		
VARD 400/2/2	06691	2475/2800	8320/10610	3.63/4.95	400Y/Δ	5.75/7.95	—	520	60	40	74.0	202	RDS 11 ^{1) 2)}	01332	M 4 ²⁾	01571	SDD 1	SDZ 2
Pole-changeable, 2 speeds (Dahlander winding Y/Y), Three-phase current, 50 Hz, protection category IP54																		
VARD 400/4/2	06782	1400/2890	5220/10700	0.80/5.90	400	3.03/8.69	—	471	40	—	74.0	207	PDA 12 ³⁾	05081	—	—	SDD 1	SDZ 2
Ex Explosion-proof, II 2G Ex h IIB T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55																		
VARD 400/6 Ex	06692	925	3465	0.25	400	0.80	—	470	40	—	21.0	—	not permitted	not permitted	SDD 1	SDZ 1		
VARD 400/4 Ex	06693	1440	5360	0.55	400	1.32	—	470	40	—	25.0	—	not permitted	not permitted	SDD 1	SDZ 1		
VARD 400/2 Ex ⁴⁾	06694	2920	10950	4.60	400	9.10	—	498	40	—	83.0	255	not permitted	not permitted	SDD 2	SDZ 2		

* For Ex types: Motor ratings see information on page 20.

¹⁾ incl. motor protection circuit breaker.

²⁾ includes operating and speed switch.

³⁾ Flush-m. version see Switch product page.


⁴⁾ A vibration monitoring system (on-site) must be provided according to DIN EN 14986.

⁵⁾ Frequency inverter with integrated sine filter, Type FU-BS 2.5, No. 05459, see product page FU.

Performance curves VAR 400/2

n=2800 1/min


Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Air noise		98	69	80	91	94	94	90	81
L _{PA, 4m} Air noise		78	49	60	71	74	74	70	61

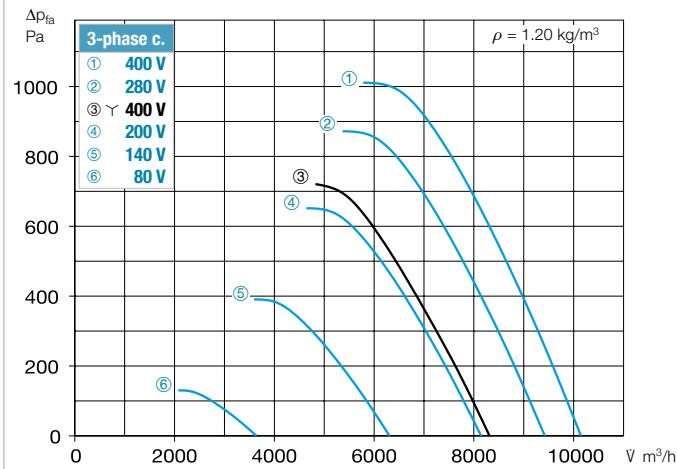

Performance curves VAR 400/4

n=1450 1/min


Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Air noise		83	59	72	77	79	77	70	60
L _{PA, 4m} Air noise		63	39	52	57	59	57	50	40

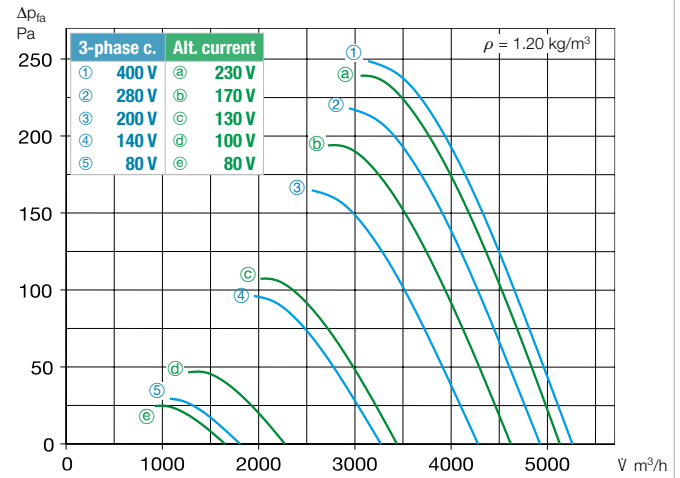

Performance curve VAR 400/6

n=930 1/min

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Air noise		72	56	62	68	68	64	56	47
L _{PA, 4m} Air noise		52	36	42	48	48	44	36	27

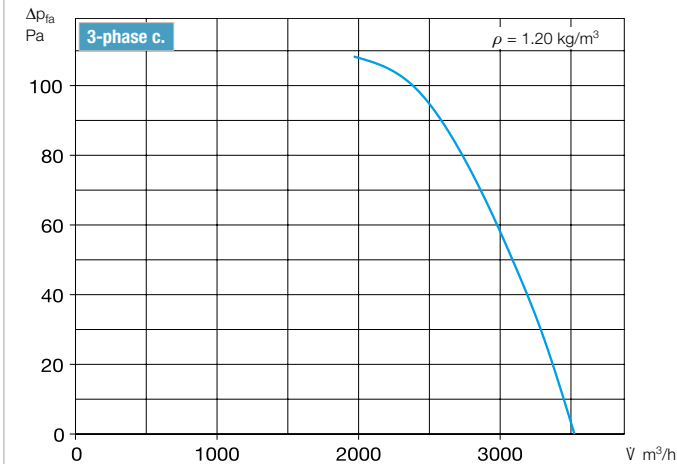


Other accessories Page

Access. for expl.-proof fans

Flanged flexible connector	
STS 400 Ex	Ref. no. 02505
Flexible connecting sleeve	
FM 400 Ex	Ref. no. 01692

Filters and silencers	485 ff.
Shutters and ventilation grilles	565 ff.
Speed controllers, controllers and switches	603 ff.

Accessories VAR 400 Description see page 280 ff.

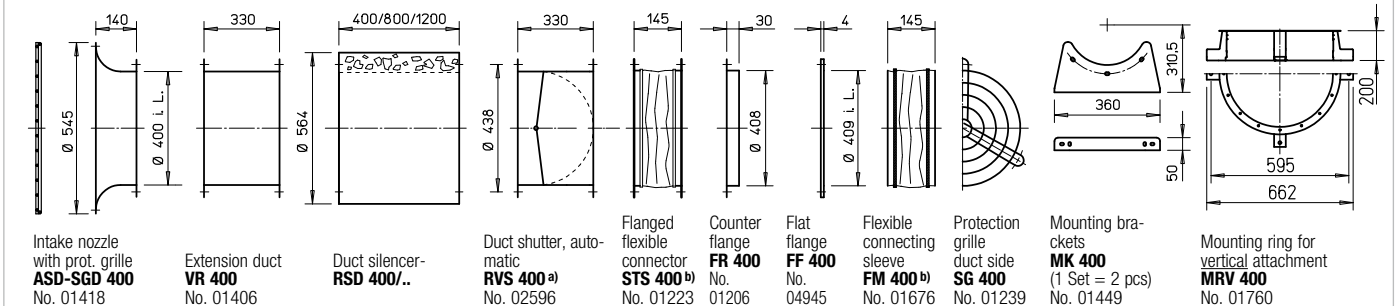

a) Shutter, motorised see Accessories product pages. b) Types for explosion-proof fans see left page.