


PU / PA




SU / SA



Pictorial schematic PU / PA

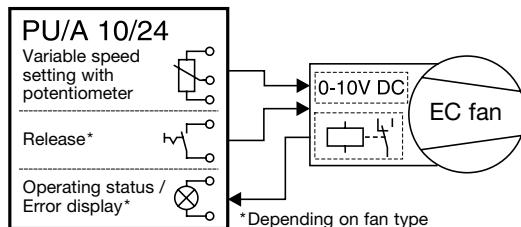

Pictorial schematic SU / SA

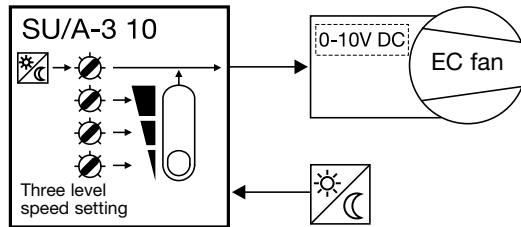

■ Speed potentiometer
PU/PA with additional functions
Switch and LED

□ **Area of application**
For direct control/setpoint specification for EC fans with a potentiometer input.
Also with release switch and LED display for operating status (depending on the fan type equipment).

□ **Control with potentiometer**
The potentiometer is directly connected to the potentiometer input on the fan control.
This has a potentiometer power supply of e.g. 10 V DC and a setpoint input of 0–10 V DC.

□ **Minimum voltage**
A second potentiometer is integrated in the PU/PA. The minimum voltage (min. 1.3 V) is continuously variable, so that a safe motor start-up is guaranteed at the lowest speed setting.

□ **Release switch**
The rotary knob for the potentiometer is also a pressure switch which can be used to activate/deactivate a fan with release input (e.g. 24 V DC).

□ **Light ring with LED**
Optical indication of fan operating status. Changes from green (normal operation) to red (fault) for fans with operation signalling relay.

■ **Product range**

□ **LED power supply 10 V**

PU 10 Ref. no. 01734
Installation in standard flush-m. box
Dim. mm W 80 x H 80 x D 21 prot.

PA 10 Ref. no. 01735
Casing Surf.-mounted installation, plastic, light grey
Dim. mm W 80 x H 80 x D 65

□ **LED power supply 24 V**

PU 24 Ref. no. 01736
Installation, dimensions see PU 10

PA 24 Ref. no. 01737
Installation, dimensions see PA 10

■ **Technical data for all types**

Potentiometer 10 kOhm
(min. potenti. approx. 7.9 – 16.5 kOhm)
A potenti. power supply of 10 V provides a control voltage 0 – 10 V DC.
Min. volt. 1.3 – 6.7 V DC adjustable.
LED supply voltage:
10/24 V DC (P 10/24), min. 6 mA
Perm. ambient temp. 0 to +40 °C
Protection category IP40
Wiring diagram no. 1000

■ **Three level switch SU / SA**
10 V / 0–10 V

□ **Area of application**
Three level switch for flush-mounted or surface-mounted installation.
Three level controlling of EC fans or frequency inverters with a 0–10 V DC control input.

□ **Functions**

Three different setpoint specifications can be issued via SU/SA.
Each level is freely definable from 0–10 V DC via a separate potentiometer.
The connection of a weekly timer (WSUP, WSUP-S, accessories) for switching from 3 level day operation to e.g. night operation is also possible.
Night/reduced operation can also be adjusted via another potentiometer from 0–10 V DC.

■ **Product range**

□ **Flush-mounted**

SU-3 10 Ref. no. 04266
Install. deep flush-m. box (D 65 mm)
Dim. mm W 80 x H 80 x D 15 prot.

□ **Surface-mounted**

SA-3 10 Ref. no. 04267
Protection category IP40
Casing Surf.-mounted installation, plastic, white
Dim. mm W 80 x H 80 x D 60

■ **Technical data
for all SU/SA types**

Supply input: 10 VDC Ri=12.5 kOhm
(safety extra-low voltage)
Internal consumption: 1.5 mA
Control output: 0 – 10 V DC
either via switch or external switchover
Prot. category IP30 when installed
Protection class III
Wiring diagram no. 1022

■ **References**

If necessary, multiple fans can be connected in parallel to one speed potentiometer or three level switch depending on the fan type to be connected.