

### HQ 500



Also available in version:




### HRF 500




Also available in version:



### Dimensions HQ 500



### Dimensions HRF 500



### Description for all types

#### ■ Casing

Made of galvanised steel sheet, types HQ and HW have additional two layer lacquer coating in papyrus white. Explosion-proof types have no lacquer coating

#### ■ Impeller

High performance characteristics with profiled blades made of plastic, dynamically balanced. Different for explosion-proof types.

#### ■ Drive

Closed die-cast aluminium casing. Prot. cat. IP55. Ball bearing mounted. Maintenance-free and radio interference-free. Winding with moisture proof coating. See type table for max. air flow temperature. Different for explosion-proof types.

#### ■ Motor protection

All types (except for explosion-proof, see page 190) are equipped with thermal contacts. These should be wired with the motor protection circuit breaker (see type table) for effective motor protection.

#### ■ Electrical connection

Standard terminal box (IP55) on back of motor. Additionally on outside of duct for HRF types. Different for explosion-proof types.

#### ■ Protection grille

Made of powder-coated steel for HQ and HW (HQ Ex galvanised). In accordance with DIN EN ISO 13857.

#### ■ Power control

The voltage-controllable types are identified in the "Current consumption max. with control"

column with a value which must be observed when determining the controller (see speed controller column). Possible assignments of frequency inverters to fans are shown in the type table. The planned use of a sine filter should be indicated when placing the order. This requires a change of fan version and additional costs, if necessary. The flow rates are shown in the performance diagram.

#### ■ Reverse operation

All types are reversible using a reverser switch. Performance reduction of approx. 1/3 in abnormal flow direction.

#### ■ Installation

Installation possible in any position, but be aware of any condensate drain holes depending on usage.

#### ■ Dimensions

Pole-changeable and explosion-proof types may differ from the above information.

#### ■ Noise levels

See performance diagram. The sound power and sound pressure at 4 m distance under free field conditions are specified for the average operating point on the inlet/outlet side. See page 14 f for noise emissions and room acoustics. Different for expl.-proof types.

| Reference            | Page   |
|----------------------|--------|
| Techn. description   | 190    |
| Selection table      | 191    |
| Planning information | 14 ff. |


#### Special design

Different voltage, protection category, air flow direction, higher air flow temperature, acid protection and impeller made of cast aluminium upon request.


| Speed                                                                                                                                      | Flow rate free-blowing | Power consump. | Current consump. |                   | Wiring diagram    | Max. air flow temp. |              | Weight net appr. | Design type                |          |                          |          |                               |
|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------|------------------|-------------------|-------------------|---------------------|--------------|------------------|----------------------------|----------|--------------------------|----------|-------------------------------|
|                                                                                                                                            |                        |                | at rated voltage | max. with control |                   | at rated voltage    | with control |                  | HQ incl. protection grille | Ref. no. | HRF                      | Ref. no. | Dim. B Motor protrusion in mm |
| min <sup>-1</sup>                                                                                                                          | V m <sup>3</sup> /h    | W              | A                | A                 | No.               | + °C                | + °C         | kg               |                            |          |                          |          |                               |
| <b>Single-phase alternating current, 230 Volt, 50 Hz, Capacitor motor, protection category IP55</b>                                        |                        |                |                  |                   |                   |                     |              |                  |                            |          |                          |          |                               |
| 935                                                                                                                                        | 5500                   | 233            | 1.05             | 1.25              | 475 <sup>1)</sup> | 60                  | 40           | 19.0             | HQW 500/6                  | 01112    | HRFW 500/6 <sup>1)</sup> | 00210    | —                             |
| 1375                                                                                                                                       | 8320                   | 1100*          | 5.90*            | 4.94              | 475 <sup>1)</sup> | 40                  | 40           | 25.0             | HQW 500/4                  | 01113    | HRFW 500/4 <sup>1)</sup> | 00211    | 60                            |
| <b>Three-phase current, 400 Volt, 50 Hz, Squirrel-cage rotor, protection category IP55</b>                                                 |                        |                |                  |                   |                   |                     |              |                  |                            |          |                          |          |                               |
| 920                                                                                                                                        | 5480                   | 218            | 0.48             | 0.55              | 469               | 60                  | 40           | 19.0             | HQD 500/6                  | 01126    | HRFD 500/6               | 00232    | —                             |
| 1345                                                                                                                                       | 8200                   | 620            | 1.22             | 1.32              | 469               | 40                  | 40           | 19.5             | HQD 500/4                  | 01127    | HRFD 500/4               | 00233    | —                             |
| 2940                                                                                                                                       | 13280                  | 3000*          | 5.71*            | —                 | 776               | 60                  | —            | 27.0             | —                          | —        | HRFD 500/2               | 00485    | 170                           |
| <b>Two-speed, three-phase current, 400 V, 50 Hz, Y/Δ connection, protection category IP55</b>                                              |                        |                |                  |                   |                   |                     |              |                  |                            |          |                          |          |                               |
| 1030/1350                                                                                                                                  | 6720/8150              | 416/617        | 0.76/1.19        | —                 | 520               | 60                  | —            | 24.0             | —                          | —        | HRFD 500/4/4             | 01470    | 120                           |
| <b>Pole-changeable, 2 speeds, three-phase current, Dahlander winding, 400 Volt, 50 Hz, protection category IP55</b>                        |                        |                |                  |                   |                   |                     |              |                  |                            |          |                          |          |                               |
| 700/1385                                                                                                                                   | 3890/8280              | 137/688        | 0.52/1.48        | —                 | 472               | 40                  | —            | 22.0             | HQD 500/8/4                | 01142    | HRFD 500/8/4             | 00407    | —                             |
| <b>Ex Explosion-proof, II 2G Ex h IIB + H<sub>2</sub> T3 Gb, Motor Ex e, three-phase current 400 Volt, 50 Hz, protection category IP55</b> |                        |                |                  |                   |                   |                     |              |                  |                            |          |                          |          |                               |
| 925                                                                                                                                        | 5610                   | 250*           | 0.80*            | —                 | 470               | 40                  | —            | 18.0             | HQD 500/6 Ex               | 01050    | HRFD 500/6 Ex            | 00489    | 10                            |
| 1430                                                                                                                                       | 8330                   | 550*           | 1.75*            | —                 | 470               | 40                  | —            | 18.0             | HQD 500/4 Ex               | 01157    | HRFD 500/4 Ex            | 00483    | 45                            |

\* Motor ratings, Ex see information on page 20. <sup>1)</sup> Type HRFW: Connection according to wiring diagram no. 965. <sup>2)</sup> Incl. motor protection circuit breaker. <sup>3)</sup> Incl. speed pole changing switch.


### Performance curves 500/2

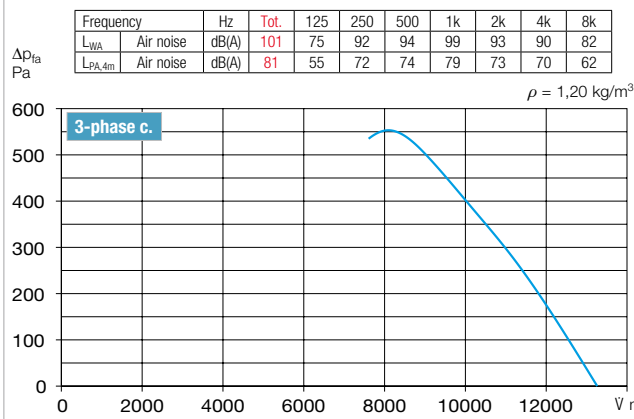

### Performance curves 500/6

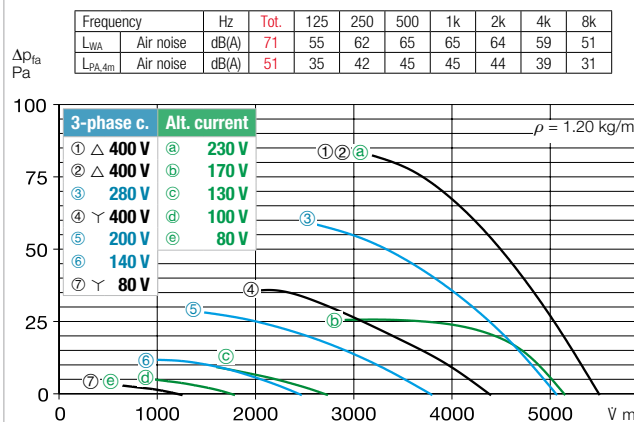

### Accessories for HRF 500 Description see page 278 ff.

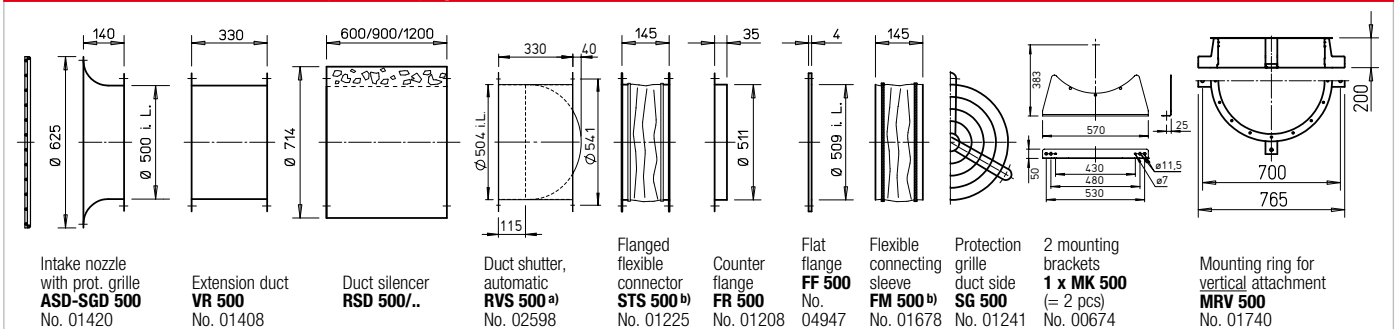


<sup>a)</sup> Shutter, motorised see Accessories product pages.

<sup>b)</sup> See below for types for explosion-proof fans.


| Frequency inverter with integrated sine filter |          | Transformer speed controller 5-step, pole changing switch |          | Electronic speed controller, continuously variable flush-m./surface-m. |             | Motor protection circuit breaker for connecting built-in thermal contacts |             | Reverser switch |          |
|------------------------------------------------|----------|-----------------------------------------------------------|----------|------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------|-------------|-----------------|----------|
| Type                                           | Ref. no. | Type                                                      | Ref. no. | Type                                                                   | Ref. no.    | Type                                                                      | Ref. no.    | Type            | Ref. no. |
| —                                              | —        | MWS 1.5 <sup>2)</sup>                                     | 01947    | ESU 3/ESA 3                                                            | 00237/00239 | MW                                                                        | 01579       | WS              | 01271    |
| —                                              | —        | MWS 5 <sup>2)</sup>                                       | 01949    | —                                                                      | —           | MW                                                                        | 01579       | WS              | 01271    |
| FU-BS 2.5 <sup>2)</sup>                        | 05459    | RDS 1 <sup>2)</sup>                                       | 01314    | ESD 5 <sup>2)</sup>                                                    | 00501       | MD                                                                        | 05849       | WS              | 01271    |
| FU-BS 2.5 <sup>2)</sup>                        | 05459    | RDS 2 <sup>2)</sup>                                       | 01315    | ESD 5 <sup>2)</sup>                                                    | 00501       | MD                                                                        | 05849       | WS              | 01271    |
| FU-BS 8 <sup>2)</sup>                          | 05461    | —                                                         | —        | —                                                                      | —           | M 4 <sup>4)</sup> /MD                                                     | 01571/05849 | WS              | 01271    |
| Speed changeover switch                        |          |                                                           |          |                                                                        |             |                                                                           |             |                 |          |
| FU-BS 2.5 <sup>2)</sup>                        | 05459    | DS 2 <sup>5)</sup>                                        | 01351    | ESD 5 <sup>2)</sup>                                                    | 00501       | M 4 <sup>4)</sup> /MD                                                     | 01571/05849 | WS              | 01271    |
| Pole changing switch                           |          |                                                           |          |                                                                        |             |                                                                           |             |                 |          |
| —                                              | —        | PDA 12 <sup>4)</sup>                                      | 05081    | —                                                                      | —           | M 3 <sup>3)</sup>                                                         | 01293       | PWDA            | 01282    |
| —                                              | —        | not permitted                                             | —        | not permitted                                                          | —           | —                                                                         | —           | —               | —        |
| —                                              | —        | not permitted                                             | —        | not permitted                                                          | —           | —                                                                         | —           | —               | —        |

<sup>4)</sup> Flush-m. version see Switch product page. <sup>5)</sup> Speed changeover switch.

### Performance curves 500/4

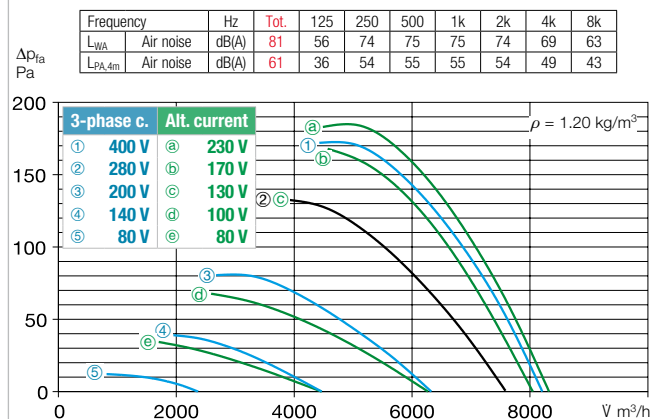

### Performance curve 500/8

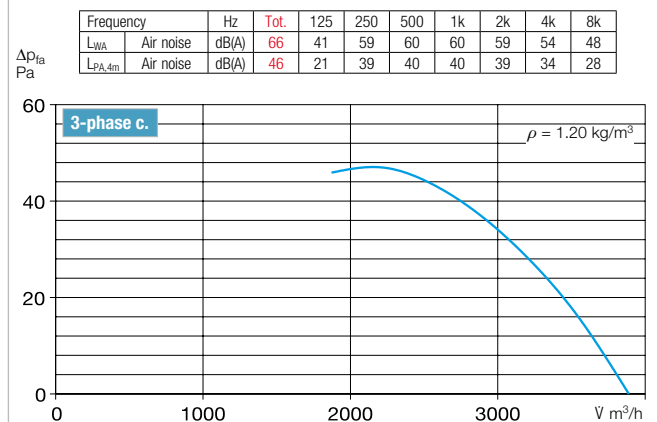

### Other accessories Page

#### <sup>b)</sup> Access. for expl.-proof fans

Flanged flexible connector  
STS 500 Ex Ref. no. 02507

Flexible connecting sleeve  
FM 500 Ex Ref. no. 01694

Extension sleeve for HS  
VH 500 Ref. no. 01348

Cylindrical pipe section,  
galvanised steel, 15 cm long.

Filter and silencers 483 ff.

Shutters and  
ventilation grilles 563 ff.

Speed controllers, controllers  
and switches 601 ff.