


Dimensions MB EC 315

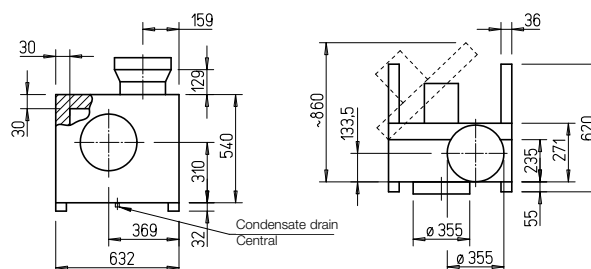

Dim. in mm

Connection: Ø 355 mm

- Noise

The total level and range are specified above the performance diagram for:

- The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.


MBD EC 315 A: Stepless speed control with internal push buttons (scope of delivery).

Standard terminal box (IP55) on outside of motor, mounted to external cable for 1~ type.


Type	Ref. no.	Connection Ø	Flow rate free blowing	Rated speed	Case-rad. sound pressure	Power con- sumption	Current consump- tion	Wiring diagram	Max. air flow temp.	Weight net aprx.	Universal control system		Speed potentiometer			
												flush-mounted		surf.-mounted		
		mm	∇ m³/h	min ⁻¹	dB(A) at 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP55																
MBW EC 315	05852	355	2110	1500	50	0.18	3.1	1568	100	43.0	EUR EC 1) 2)	01347	PU 10 1)	01734	PA 10 1)	01735
Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP55																
MBD EC 315 A	05851	355	3500	2500	59	0.83	1.30	1582	120	44.0	EUR EC 1) 2)	01347	PU 10 1)	01734	PA 10 1)	01735
MBD EC 315 B	05846	355	4200	3000	65	1.38	2.20	988	120	50.0	EUR EC 1) 2)	01347	PU 10 1)	01734	PA 10 1)	01735

1) Multiple EC fans can normally be connected. 2) Alternative electronic diff. pressure/temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267). 04266/04267, see accessories.


Performance curves MBW EC 315

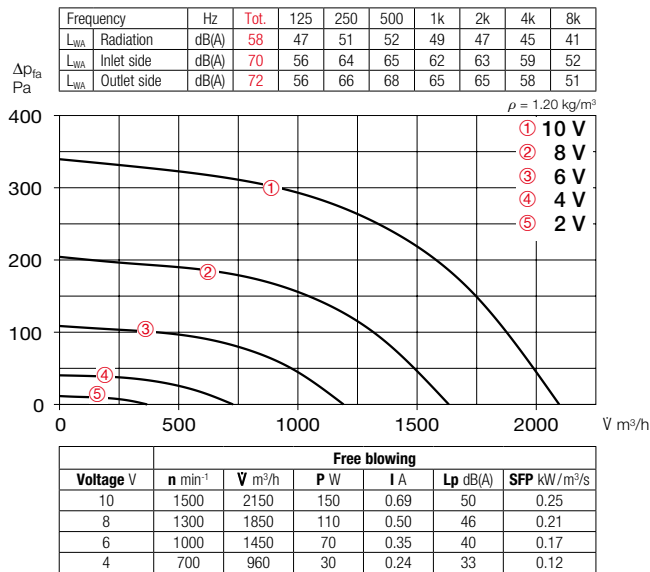

Performance curves MBD EC 315 A

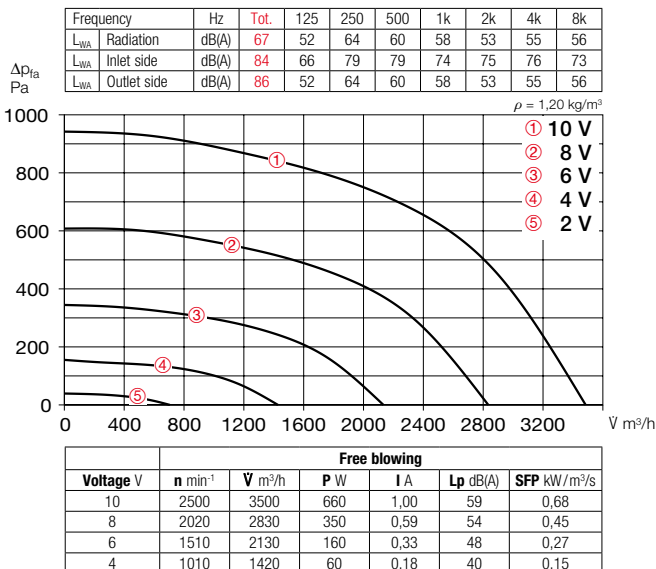

Performance curves MBD EC 315 B

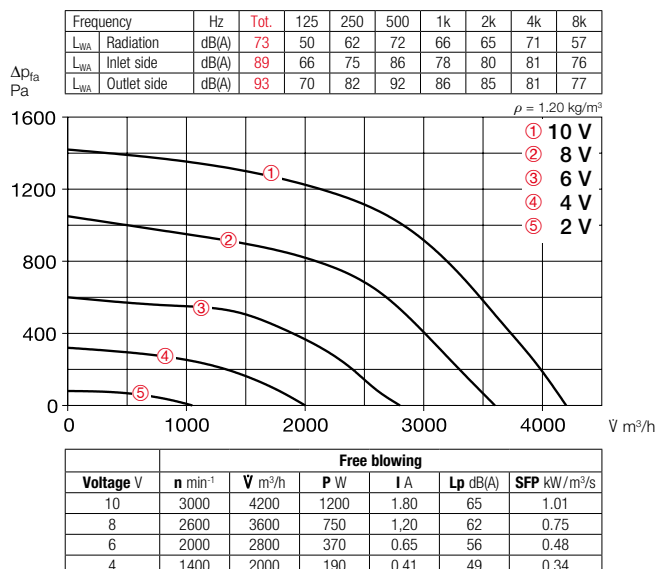

Accessories

Wall bracket

Bracket for wall installation, made of galvanised steel sheet.

MB-WK EC315 Ref. no. 05527



Weather protection cover

For protected outdoor coverage. Made of galvanised steel sheet, mounted above motor.

MB-WSD EC315 No. 01865



Flexible connecting sleeve

Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances.

– Max. temperature +70 °C

FM 355 Ref. no. 01675

– Max. temperature +120 °C

FM 355 T120 Ref. no. 01658



Universal control system

For continuously variable control or regulation of single phase and three-phase EC fans with a setpoint input of 0–10 V DC.

EUR EC Ref. no. 01347



Speed potentiometer

For direct control/setpoint setting for EC fans with potentiometer input.

PU 10 Ref. no. 01734

For flush-mounting.

PA 10 Ref. no. 01735

For surface-mounting.



Five-step speed switch

SA-5 10 Ref. no. 40229

Five-step switch for surface mounting. For five-step control of EC fans or frequency inverters. Steps from 2 to 10 V can be set via off-set. Protection class IP54.



Accessory details Page

Universal control system, electronic controller, speed potentiometer 615 ff.