


SB EC 355



Virtually silent with high volume output and pressure performance. Ideal for cleaning and inspection.



Dimensions SB EC 355

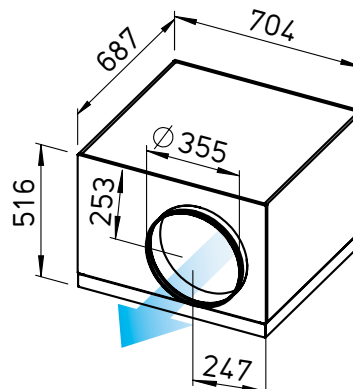

Dim. in mm

■ **Casing**

Designed as a silencer. Equipped with abrasion-resistant, sound-absorbing mineral fibre boards (50 mm). Removable cover with locking clamp. Freely accessible fan. Removable motor-impeller unit, the removal area must be considered. Inlet and outlet side connectors with rubber lip seal corresponds to standard duct Ø. All parts made of galvanised steel sheet.

■ **Impeller**

With backward curved blades. Inlet via nozzle.

■ **Drive**

Energy-saving, speed-controllable EC external rotor motor in protection category IP44 with high efficiency. Maintenance-free and ball bearing mounted. Motor and impeller dynamically balanced for low-noise operation.

■ **Motor protection**

Integrated electronic temperature monitoring system for EC motor and electronics.

■ **Power control**

Continuously variable speed control with internal (delivery) or external potentiometer or continuously variable speed control with universal control system (see table). Performance levels are shown in the performance curve as an example.

■ **Electrical connection**

Terminal box (IP54) mounted to external cable (aprx. 60 cm long).

■ **Protection category**

IP44 with connected duct system.

■ **Installation**

No restrictions in any position (horizontal, vertical, diagonal) through corresponding installation for supply or extract ventilation. Mounting bracket included in delivery.

■ **Noise**

The total level and range are specified above the performance diagram for:


- ☐ Case-radiated sound power
- ☐ Inlet side sound power
- ☐ Outlet side sound power.

The case-radiated noise as sound pressure at 1 m (free field conditions) is also specified in the type table and the table below the performance curve.

Type	Ref. no.	Conne- ction Ø	Flow rate Free blow- ing	Rated speed	Sound press. case radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system	Speed potentiometer				
												flush-mount.	surf-mount.			
		mm	l m³/h	min ⁻¹	dB(A) in 1 m	kW	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
Type SB EC, Single-phase alternating current, 230 V, 50/60 Hz, EC motor, IP54																
SB EC 355	06139	355	2710	1630	53	0.36	1.56	979	60	38	EUR EC ¹⁾²⁾	01347	PU 10 ¹⁾	01734	PA 10 ¹⁾	01735

¹⁾ Multiple EC fans can normally be connected. ²⁾ alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see accessories.

Performance curves SB EC 355

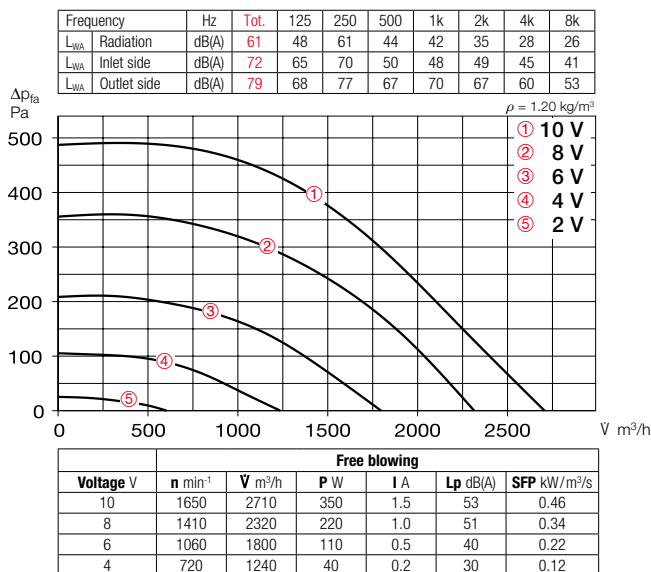

Accessory details Page

Filters, heating elements and silencers	483 ff.
Temperature control systems for heating elements	489, 493 ff.
Flexible ventilation ducts, ventilation grilles, fittings, roof outlets	563 ff.
Disc valves	584 ff.
Universal control system, electronic controllers, speed potentiometer	615 ff.

Accessories

Flexible connecting sleeve

FM 355 Ref. no. 01675

Includes 2 hose clamps; for installation between fan and duct system. Prevents structure-borne noise transmission and bridges installation tolerances. 2 pcs required for inlet and outlet side application.



External wall shutter

VK 355 Ref. no. 00761

Automatic made of plastic, light grey.



External wall cover grille

RAG 355 Ref. no. 00753

For placement in front of air inlet and outlet openings in facades. Made of plastic, light grey.



Duct shutter

RSK 355 Ref. no. 05650

Automatic, made of metal.



Flexible cross talk silencer

FSD 355 Ref. no. 00682

Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.



Air filter box

LFBR 355 Coarse 70%* 08583

LFBR 355 ePM1 50%* 08536

Air filter with large surface area and absorption capacity for installation in pipeline. Connections with double lip seal, matched to standard.



Electric heating element

EHR-R 355 9.0 kWNo. 08656

– with integrated temp. control

EHR-R 9/355 TR 9.0 kWNo. 05297

Room or duct sensor (TFK/TFR, Accessories) required.



Temperature control system for electric heating element

EHR-R

EHSD 16 Ref. no. 05003



Warm water heating element

WHR 355 Ref. no. 08790

Compact heat exchanger for installation in duct system.



Temperature control system for warm water heating element

WHS HE Ref. no. 08319



* See product page 486 for detailed description.