


Horiz. outlet RD 180



Vert. outlet VD 180




Dimensions RD 180

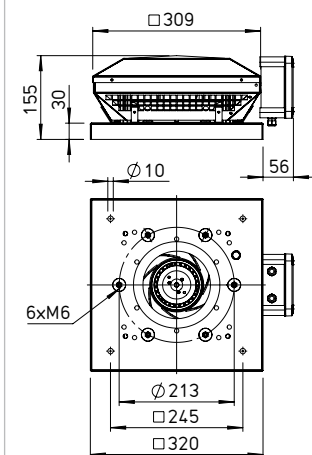

Dim. in mm

Dimensions VD 180

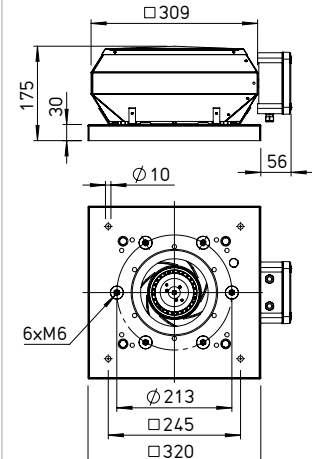

Dim. in mm

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description of all series

■ Casing

Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

■ Impeller

High-performance centrifugal impeller with backward curved blades made of plastic. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

■ Drive

Speed-controllable external rotor motor in closed design (IP44). Ball bearing mounted with moisture protection. Maintenance-free and radio interference-free.

■ Motor protection

Through built-in thermal contacts which are wired in series to the winding and automatically deactivate and reactivate after cooling when the motor temperature is too high.

■ Electrical connection

To external terminal box in protection category IP65. Isolator switch is optionally available (see Accessories).

■ Protection grille

On the outlet side as standard according to DIN EN ISO 13857.

■ Power control

All types have continuously variable speed control in the range from 0 – 100 % through electronic speed controllers or five-step control units. Assignment see type table.

■ Delivery

Units are ready-for-connection, fully pre-assembled in the shipping box.

■ Noise

The total level and range are specified above the performance diagram for:

☐ Inlet side sound power


☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Dimensions Accessories for RD / VD 180


Counter flange FR 180

Ref. no. 01200





Corrugated roof base, profile 5 WDS 180

Ref. no. 01559




Flanged flexible connector STS 180

Ref. no. 01217




Shutter, automatic DVS 180

Ref. no. 01247




Base silencer, hinged SSD 180

Ref. no. 05289



Flat roof base, hinged FDS 180

Ref. no. 01377




Dim. in mm

References	Page
Planning information	14 ff.
Technical description	501 f.
Selection table	504 f.
Accessories, details	560 f.
Speed controllers, controllers and switches	601 ff.

Performance curves RDW 180/2


Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Inlet side	dB(A)	61	37	48	53	56	55	54	44
L _{WA} Outlet side	dB(A)	65	38	52	58	62	57	54	45

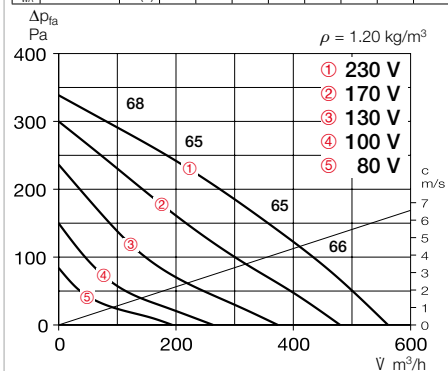

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump.		Wiring diagram	Max. air flow temp.		Weight net	Motor protection circuit breaker		Speed controller 5-step	
						at rated voltage	with control		at rated voltage	with control		Type	Ref. no.	Type	Ref. no.
		min ⁻¹	m ³ /h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
RDW 180/2	07122	2320	566	46	58	0.25	0.25	923	70	70	4.6	—	—	TSW 1.5	01495

Performance curves VDW 180/2

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Inlet side	dB(A)	60	36	47	52	55	54	53	43
L _{WA} Outlet side	dB(A)	63	38	51	56	59	57	52	43

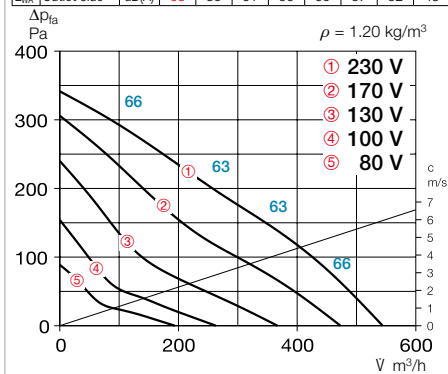

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump.		Wiring diagram	Max. air flow temp.		Weight net	Motor protection circuit breaker		Speed controller 5-step	
						at rated voltage	with control		at rated voltage	with control		Type	Ref. no.	Type	Ref. no.
		min ⁻¹	m ³ /h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Single phase alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP44															
VDW 180/2	07120	2320	545	46	56	0.25	0.25	923	70	70	4.6	—	—	TSW 1.5	01495