

Accessories

Light dome

- LK 12** Ref. no. 82059
- LK 15** Ref. no. 82060


Light dome with 300 mm skylight base (500 mm on request) and 24 Volt RWA linear actuator. Opal, 3-skinned (Ug: 1,9 W/(m² K)) light dome design with coloured plastic glazing. Scope of delivery: Sky-light, skylight base, linear actuator, hinge bracket and piston slide bracket.

Light dome incl. fall-through protection:

- LK-F 12** Ref. no. 40798
- LK-F 15** Ref. no. 40799

Type	Ref. no.	Dimensions in mm		
		A i.L	B	C
<b>LK 12</b>	82059	1200	1000	300
<b>LK 15</b>	82060	1500	1300	300
<b>LK-F 12</b>	40798	1200	1000	300
<b>LK-F 15</b>	40799	1500	1300	300

LK..

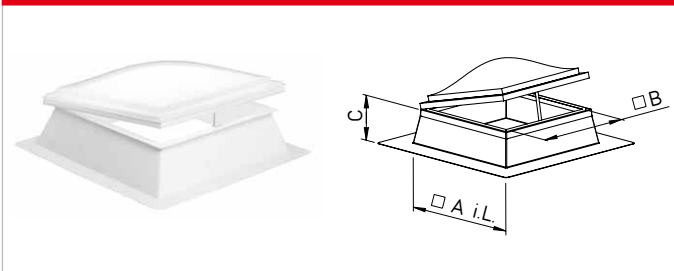


Multi-leaf damper

JVK

Multi-leaf damper JVK: Designed in square frame casing with connection flanges made from galvanised sheet steel on both sides. Airtight connection to frame casing. Installation only with horizontal slat position.

Type	Ref. no.	Dimensions in mm				
		A	B	C	D	E
<b>JVK 60/60</b>	01066	600	640	620	Ø 9	120
<b>JVK 70/70</b>	01067	700	740	720	Ø 9	120
<b>JVK 80/80</b>	01068	800	840	820	Ø 9	120
<b>JVK 90/90</b>	01069	900	940	920	Ø 9	120
<b>JVK 100/100</b>	01074	1000	1040	1020	Ø 9	120

JVK

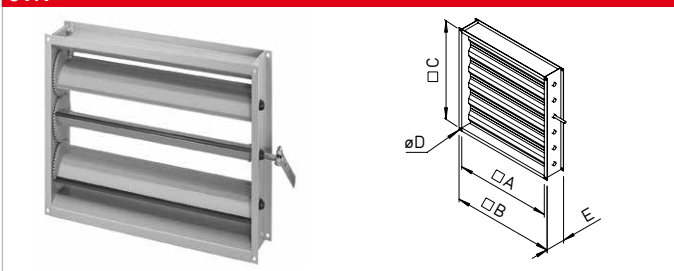


Multi-leaf damper

JKG 70/50

Multi-leaf damper JKG 70/50 with mounted aluminium screen. Nom. dim. multi-leaf damp. 700 x 500 mm. Nom. dim. screen 880 x 555 mm. Depth multi-leaf damper 175 mm. Depth screen 85 mm. Total depth 260 mm. Total weight approx. 18 kg. Leak tightness (EN 1751) Class 2.

Type	Ref. no.	Dimensions in mm		
		A	B	C
<b>JKG 70/50</b>	04979	931	601	85

JKG 70/50

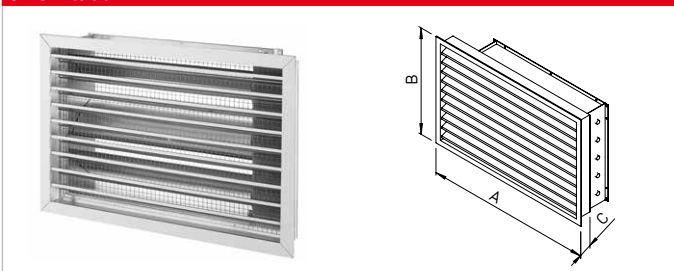

Bypass control damper

BRK 1000 x 1000

Bypass control damper BRK 1000 x 1000, optional for actively controlled air discharge shafts. Aluminium design incl. 24 V DC drive. Opens and closes within 1.5 seconds. Nominal size BRK 1000 x 1000 m. External dimensions BRK 1287 x 1072 mm. Depth BRK 165 mm. Total weight approx. 23 kg

Type	Ref. no.	Dimensions in mm				
		A	B	C	D	E
<b>BRK 1000 x 1000</b>	37507	1000	1036	1072	1287	165

BRK 1000 x 1000



Damper servo motor

- STM 10 24V 2P** Ref. no. 01075
- STM 20 24V 2P** Ref. no. 01093
- STM 16 24V S** Ref. no. 21112

Electrical 24 Volt servo motor with spring return (STM 16 24V S with open-close/3-point) for opening and closing shutters JVK and JKG. Torque 10 und 20 Nm (depending on type).

Adaption module, Type APM no. 28735  
24 V for pole change to 3-point.  
For controlling 3-point drives.

STM 10 / STM 20 / STM 16

