


B VD 900 F400/F600

Dimensions B VD 900 F400/F600

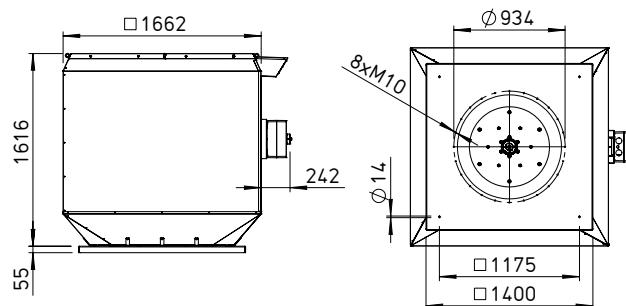

Dim. in mm

■ Application

- In mechanical smoke extraction systems (MRA) for ensuring smoke extraction in special structures, such as sales locations, large garages, meeting locations or industrial buildings.
- Smoke extraction with temperature classes F400 and F600.
- Also suitable for ventilation operation (Dual-Use).
- For increased ventilation requirements with a continuous air flow temperature of up to 120 °C.

■ Features

- Smoke exhaust roof fan as a smoke extraction fan with dual-function (smoke extraction and ventilation).
- Robust design with efficiency-optimised casing for difficult operating conditions.
- High operational reliability due to minimal maintenance requirements.
- Ready-for-use delivery for easy installation.
- Base plate with threaded bolts for the easy mounting of inlet-side accessories.
- Standard PTC thermistor as motor protection for ventilation operation (motor protection devices must be automatically deactivated in case of fire for max. operating duration).

- Motor outside of air flow, enclosed in self-ventilated motor casing for optimal motor cooling.
- Comprehensive accessories enable perfect compliance with property-specific requirements.
- Isolator switch for electrical connection as standard.
- Perfectly tuned for operation with frequency inverter.

■ Casing

- Made of seawater-resistant aluminium for maximum weather protection.
- Base plate with inlet nozzle and motor support made of hot-dip galvanised steel sheet.
- Vertical air outlet prevents damage to adjacent parts of the building in case of fire.
- Outlet-side aluminium protection grille.
- Standard transport lugs for simple positioning.
- Attractive architectural design.

■ Impeller

- Directly driven high-performance centrifugal impeller, with eight backward curved blades.
- Design made of powder-coated steel sheet.
- Single-side inlet.
- Dynamically balanced, quality class 6.3.

- High efficiency for maximum output with low-noise operation.
- Direct mounting of hub to motor shaft.

■ Drive

- High-quality smoke exhaust motor for high environmental temperatures, perfectly tuned for use in smoke extraction fans.
- Enclosed motor design, protection category IP55.
- Winding insulation class H.
- Motor outside of air flow, protected from this by thermal separation.
- Innovative motor cooling concept, perfectly tuned for smoke extraction with frequency inverter operation and reduced speed.
- Motor cooling airflow through intake duct. Automatic flow during fan operation.
- Motor bearings can be monitored with Helios bearing condition diagnostics system (Accessories).

■ Speed control

- Optimal ventilation operation with speed control by means of frequency inverter.
- Smoke extraction possible with frequency inverter operation, elaborate bypass circuit can be omitted in case of fire.

- It must be ensured that operation takes place at the speed required for the smoke extraction flow rate for smoke extraction.
- Frequency inverter with all-pole sine filter and special operating mode for smoke ventilation operation is essential (Accessories).

■ Dual function (Dual-use)

- Approved for daily ventilation on demand and smoke extraction.
- Ventilation in continuous operation possible.
- High efficiency meets the ERP requirements for Dual-Use smoke extraction fans.

■ Assembly/Installation

- Outdoors on horizontal roof (vertical motor shaft) or flat roof base. Flat roof base, see Accessories.
- Snow load class 0 pursuant to DIN EN 12101-3, installation on roofs above heated rooms. For snow load class SL 2000 and SL 3000: Outlet-side deflector, see Accessories.
- Standard transport lug for simple positioning.
- Inlet-side connectable accessories can be attached to the threaded bolts in the base plate (hole pattern according to DIN 24155).

Type	Ref. no.	Speed	Output free-blowing	Sound pres. casing-radiated	Sound power level casing-radiated	Nominal motor output	Nominal motor current	Starting current	Wiring diagram	Net weight approx.	Frequency inverter	Smoke ventilation fan control system
		min ⁻¹	Vm ³ /h	dB(A) in 4 m	dB(A)	kW	A	A	No.	kg	Type	Ref. no.


F400 Single speed, three phase motor 400 V, 50 Hz, protection category IP55

B VDD 900/4 F400	01719	1.480	65.350	89	109	37.00	69.20	533	1307	848	—	EVS-SD 009	04578	
B VDD 900/6 F400	01720	975	43.200	82	102	15.00	28.20	217	1307	618	FU-CS 32	05471	EVS-SD 005	04582

F600 Single speed, three phase motor 400 V, 50 Hz, protection category IP55

B VDD 900/4 F600	01721	1.480	65.350	89	109	37.00	69.20	533	1307	848	—	EVS-SD 009	04578	
B VDD 900/6 F600	01723	975	43.200	82	102	15.00	28.20	217	1307	618	FU-CS 32	05471	EVS-SD 005	04582

Performance diagram B VD 900 F400/F600

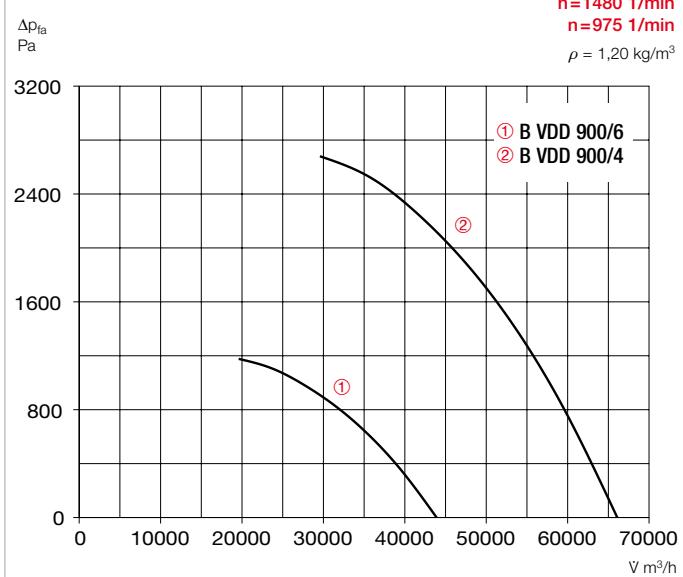

■ Air flow temperature

- Temperature classes F400 and F600.
- Smoke extraction 400 °C/120 minutes, or 600 °C/120 minutes.
- 120 °C continuous air flow temperature.
- For ambient temperatures from -20 °C to +60 °C.

■ Noise levels

- The horizontally radiated noise is specified as sound pressure level in 4 m (freefield conditions) in the type table.
- Different installation situations or disturbed flows can lead to increased noise levels.
- Hood silencer and silencer insert for flat roof base, see Accessories.

■ Motor protection

- All types have PTC thermistors in the motor winding as standard.
- PTC thermistor assessment with suitable full motor protection device, EVS or frequency inverter (Accessories).
- The motor protection must be automatically bridged/bypassed in case of smoke extraction (deactivation) to ensure the maximum function duration.

■ Voltages and frequencies

- Nominal voltage and frequency are specified in the table. These also form the basis for the performance data.

■ Electrical connection

- To external isolator switch in protection category IP65.
- Isolator switch can be locked in position "0 OFF" and "I ON" using on-site padlock.
- Fans with a nominal motor output up to 2.20 kW can be directly activated, with star-delta start-up for 3.00 kW and above.

■ Delivery information

- Ready-to-use units, completely pre-assembled.
- Simple positioning with standard transport lug.

■ Safety information

- Outlet-side with aluminium protection grille as standard. Prevents penetration of leaves and solids and provides contact protection.

■ Fire test

- Successfully tested according to DIN EN 12101-3: 2015-12.

■ Certification

The smoke extraction fans BK have been tested according to DIN EN 12101-3. Certificate of performance reliability:
F400: 0761-CPR-1052
F600: 0761-CPR-1053

■ Accessories

Flat roof base

B FDS 900/300 Ref. no. 01884

B FDS 900/500 Ref. no. 02000

Flat roof base for B VD F400 and F600 in heights 300 mm and 500 mm for mounting on flat roof.



Silencer insert

B SSD 900 Ref. no. 03532

Silencer insert with connectors for flat roof base for inlet-side noise reduction. Flat roof base B FDS required.



Hood silencer

B HSDV 900 Ref. no. 03372

Hood silencer with inner core for outlet-side noise reduction.



Deflector

B DEF 900/2000 Ref. no. 40086

B DEF 900/3000 Ref. no. 03473

Deflector with snow load class SL 2000 and SL 3000 for mounting on B VD F400 and F600.



Inlet nozzle with protection grille

ASD-SGD 900 Ref. no. 01309

Flexible connector

STSB 900 F400 Ref. no. 01920

STSB 900 F600 Ref. no. 02008



Extension duct

VR 900 Ref. no. 01311



Duct shutter

RVS 900 Ref. no. 02603

In case of a direct fan connection, an additional extension duct (VR 900 Ref. no. 01311) must be placed in between.



Smoke exhaust fan control system

EVS-SD 009 (45 kW) no. 04578

EVS-SD 005 (15 kW) no. 04582

Smoke exhaust fan control system for the operation of B VD F400/F600.




Bearing condition diagnostics system

LZD-Basic Ref. no. 27495

LZD-Comfort Ref. no. 27497

For ensuring the functionality of motor bearings. Factory-mounted to fan.



■ Information

Notes on operation in case of fire:

- Unhindered discharge of smoke gases at all times.
- Motor protection devices must be automatically bridged.
- Secure electrical power supply (safety power supply) required.

The relevant regulations apply for the maintaining the functionality of electrical circuit systems.

Planning information p. 10 ff.

■ Accessories

Mounting accessories 167 ff.

Control devices, switches 174 ff.