


B VAR 560 F300/F400



Dimensions B VAR 560 F300/F400

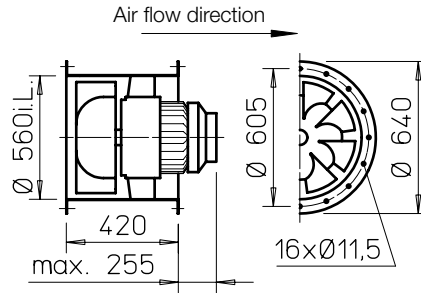

All dim. in mm

- Casing**
 Duct with flanges on both sides DIN 24155 pt. 3. Welded construction, hot-dip galvanised. Welded guide vane with inner hub for mounting the flange motor, hot-dip galvanised.
- Impeller**
 Optimised for high pressure and volume output. Special development with spatially curved hot-dip galvanised steel blades
- Motor**
 Direct through efficient IE3 three phase motor (smoke extraction motors F300 and F400). Pole-switching fans with IEC standard motor. Protection class IP55. Insulation class H. External cable with sheathing.
- Motor protection**
 All types (except pole-switching) have PTC resistors as standard and must be protected with a full motor protection device (MSA, Ref. no. 01289). This must be bridged in smoke extraction situation.
- Installation**
 Installation in any position. Suitable for installation within and outside of the fire zone.
- Electrical connection**
 Standard terminal box in temperature-resistant design (protection class IP54) outside of duct.
- Safety information**
 Guard for impeller pursuant to DIN EN ISO 13857 must be secured by installation.
- Noise levels**
 See information on sound power levels above the performance curves. The lower sound pressure level can be determined using the diagram on the "Technical information" page. Noise emissions and room acoustics see page 5.

Double pressure

■ Mounting package MP-Z for two-stage Z unit
 For arrangement of two identical fans in a row, for highest pressure ratings.
 Scope of delivery: Extension ducts (2 pcs.) and assembly kit.
 Weight: 32 kg


MP-Z 560 Ref. no. 04908

Double volume

■ Mounting package MP-P for parallel P unit
 For arrangement of two identical fans side by side, for highest flow rates.
 Scope of delivery: Extension ducts, backdraught shutter, mounting rails (2 pcs. each), mounting brackets (4 pcs.) and assembly kits.
 Weight: 82 kg

MP-P 560 Ref. no. 04892


Dimensions MP-Z 560

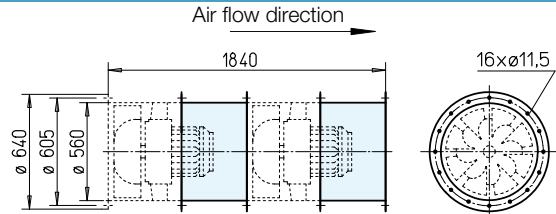

All dim. in mm

Double pressure

Dimensions MP-P 560

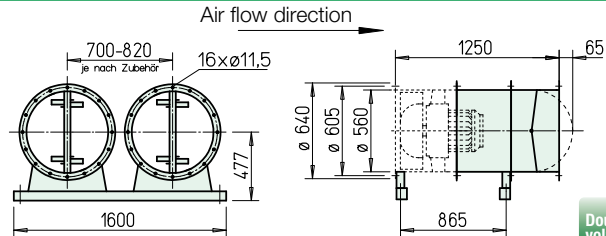


All dim. in mm

Double volume

Performance curves B VAR 560/4 F300/F400

n = 1450 1/min


Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA}	Air noise	dB(A)	93	69	83	87	90	87	80	70
L _{PA,4m}	Air noise	dB(A)	73	49	63	67	70	67	60	50

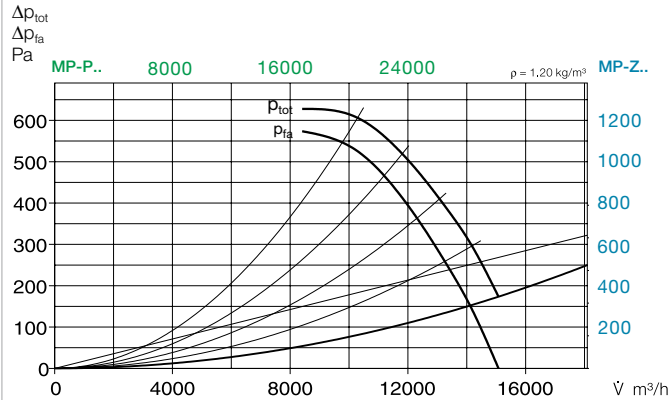

Performance curves B VAR 560/8 F300/F400

n = 725 1/min

Frequency	Hz	Total	125	250	500	1k	2k	4k	8k	
L _{WA}	Air noise	dB(A)	76	61	68	72	72	66	58	51

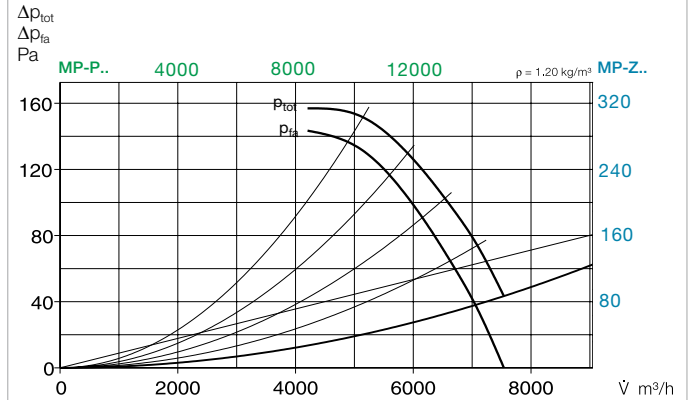

Certification

The smoke extraction fans B VARD have been tested according to DIN EN 12101-3. Certificate of performance reliability:
F300: 0036-CPR-RG05-01
F400: 0036-CPR-RG05-05


Information

Techn. description 84 ff.
Project planning information 13 ff.

Accessory details

Mounting accessories 161 ff.
Attenuator 166
Gas warning systems, switch and control technology 168 ff.

Accessories for B VAR 560 F300/F400 Description see page 161 ff.

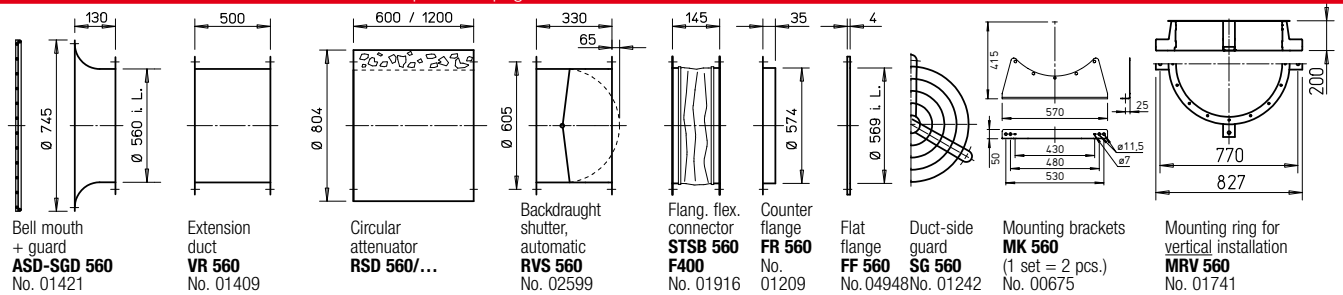

Type	Ref. no.	Speed	Output free-blowing	Nom. motor power. (output)	Nominal voltage	Power consumption	Wiring diagram	max. air flow temp. ¹⁾	Net weight approx.	Smoke exhaust fan control system incl. full motor protection	Anti-vibration mount ²⁾				
											Pressure		Tensile		
		min ⁻¹	V m ³ /h	kW	V	A	No.	+°C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
F300 Three phase motor, 50 Hz, protection class IP54															
B VARD 560/4 F300	02330	1440	14710	3.0	400	6.15	776	40 / 300	106	EVS-SD 001	04586	SDD 4	01944	SDZ 4	01945
F300 Pole-switching, 2 speed (Dahlander winding γ/γ), three phase motor 50 Hz, protection class IP54															
B VARD 560/8/4 F300	02331	690/1410	7380/14970	0.7/2.8	400	2.41/6.01	777	40 / 300	106	on demand		SDD 4	01944	SDZ 4	01945
F400 Three phase motor, 50 Hz, protection class IP54															
B VARD 560/4 F400	02412	1440	14710	3.0	400	6.15	776	40 / 400	110	EVS-SD 001	04586	SDD 4	01944	SDZ 4	01945
F400 Pole-switching, 2 speed (Dahlander winding γ/γ), three phase motor 50 Hz, protection class IP54															
B VARD 560/8/4 F400	02413	690/1410	7380/14970	0.7/2.8	400	2.41/6.01	777	40 / 400	106	on demand		SDD 4	01944	SDZ 4	01945

¹⁾ For ventilation / smoke extraction (once 120 min. at 300 °C or 120 min. at 400 °C).

²⁾ For Z/P version due to higher total weight Type allocation according to tables on page 157.