


B AVD 500




Dimensions B AVD 500

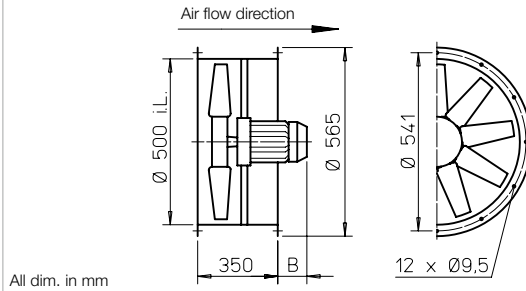


Performance curves B AVD 500/4

n=1420 1/min

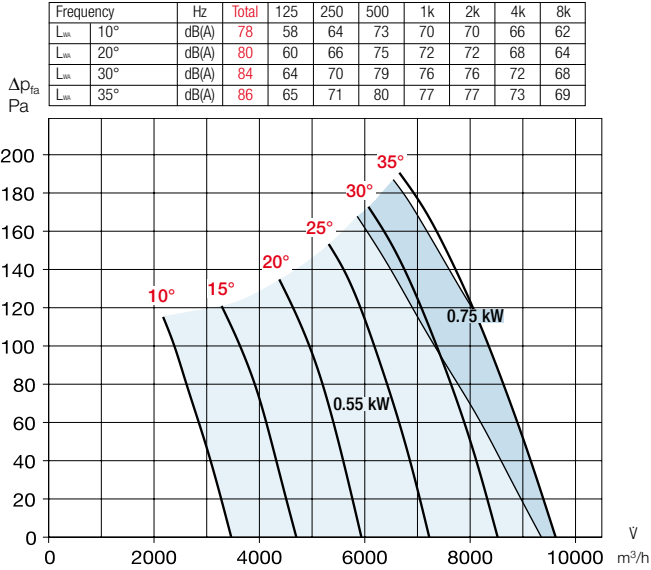

Accessories for B AVD 500

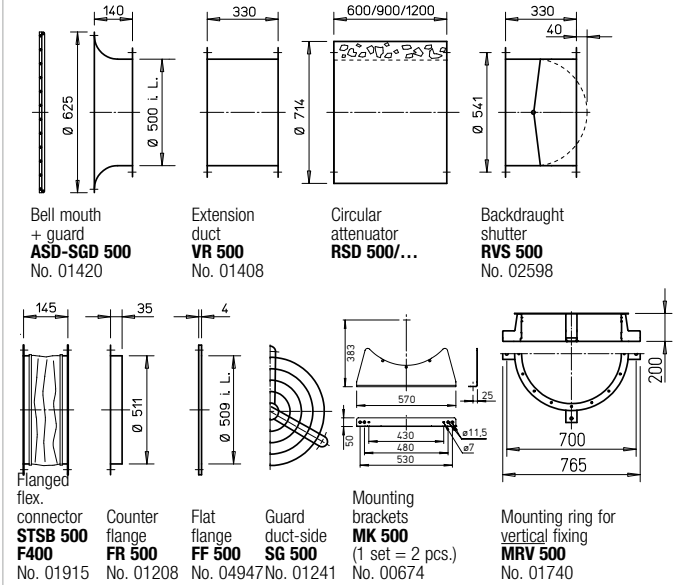

Certification

The smoke and heat exhaust fans B AVD have been tested according to DIN EN 12101-3.
Certificate of conformity:
F300: 0036-CPR-RG05-03
F400: 0036-CPR-RG05-06

Information

Page	
Techn. description	22 f.
Project planning information	10 ff.
Accessory details	
Mounting accessories	160 ff.
Attenuators	168
Gas warning systems, switch and control technology	170 ff.

Type	Ref. no.	Speed	Air flow volume (FID)	Motor pow. nom. (output)	No-minal voltage	Power consum. nom.	Pitch angle	Wiring diagram	Max. air flow temp. ¹⁾	Dim. B Motor protrusion	Net weight approx.	Pole switch surface-mounted		Anti-vibration mounts NG			
														Pressure		Tensile	
		min ⁻¹	V m³/h	kW	V	A	°	No.	+°C	mm	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
F300 3 phase motor, 50 Hz, protection class IP54																	
B AVD 500/4 0,55 kW F300	02315	1420	9360	0.55	400	1.23	*	776	40 / 300	41	36	EVS-D 001	04594	SDD 1 F	01942	SDZ 1 F	01943
B AVD 500/4 0,75 kW F300	02316	1420	9360	0.75	400	1.62	*	776	40 / 300	41	38	EVS-D 001	04594	SDD 1 F	01942	SDZ 1 F	01943
F300 Pole-switching, 2 speed (Dahlander winding ) , 3 phase motor, 50 Hz, protection class IP54																	
B AVD 500/8/4 0,2/0,8 kW F300	02319	690/1415	4680/9360	0.2/0.8	400	0.88/1.99	*	777	40 / 300	41	39	on demand		SDD 1 F	01942	SDZ 1 F	01943
F400 3 phase motor, 50 Hz, protection class IP54																	
B AVD 500/4 0,55 kW F400	02401	1420	9360	0.55	400	1.23	*	776	40 / 400	41	36	EVS-D 001	04594	SDD 1 F	01942	SDZ 1 F	01943
B AVD 500/4 0,75 kW F400	02402	1420	9360	0.75	400	1.62	*	776	40 / 400	41	38	EVS-D 001	04594	SDD 1 F	01942	SDZ 1 F	01943
F400 Pole-switching, 2 speed (Dahlander winding ) , 3 phase motor, 50 Hz, protection class IP54																	
B AVD 500/8/4 0,2/0,8 kW F400	02403	690/1415	4680/9360	0.2/0.8	400	0.88/1.99	*	777	40 / 400	41	39	on demand		SDD 1 F	01942	SDZ 1 F	01943

* The flow volume and pressure increase information is required to determine the pitch angle.

¹⁾ For ventilation operation / smoke extraction (one time 120 min. at 300 °C or 120 min. at 400 °C).