



B AVD 800




Dimensions B AVD 800

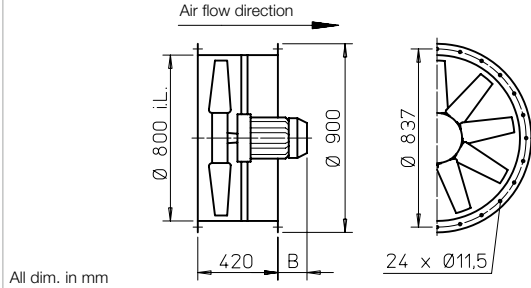

Performance curves B AVD 800/4

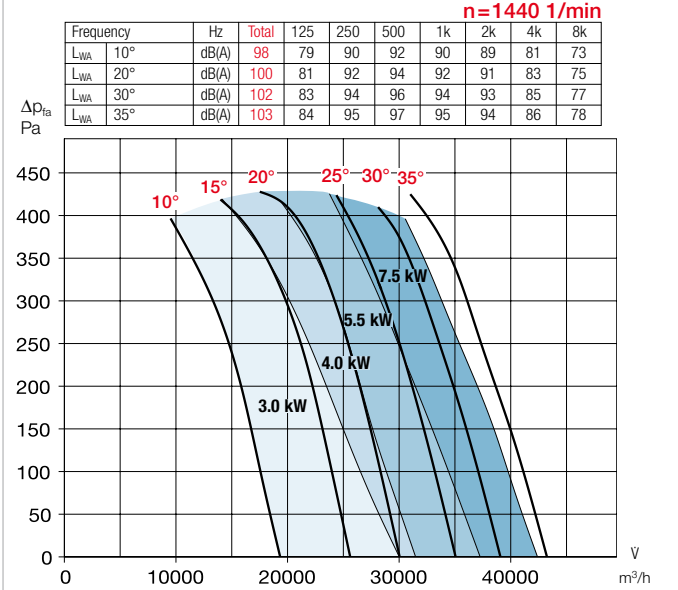

Accessories for B AVD 800

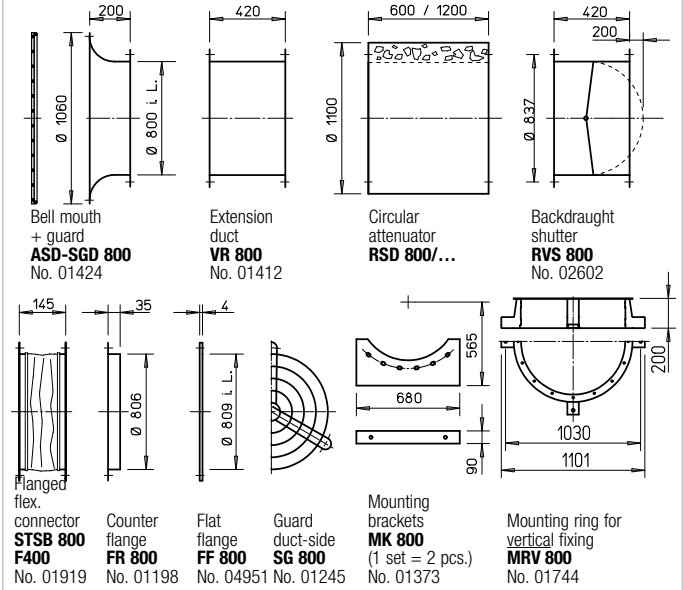

Certification

The B AVD have been tested according to DIN EN 12101-3. Certificate of conformity: F300: 0036-CPR-RG05-03 F400: 0036-CPR-RG05-06

Information

Techn. description 22 f.
Project planning information 10 ff.

Accessory details

Mounting accessories 160 ff.
Attenuators 168
Gas warning systems, switch and control technology 170 ff.

Type	Ref. no.	Speed	Air flow volume (FD)	Motor pow. nom. (output)	No-minal voltage	Power consum. nom.	Pitch angle	Wiring diagram	Max. air flow temp. ¹⁾	Dim. B Motor protrusion	Net weight approx.	Pole switch surface-mounted		Anti-vibration mounts NG			
														Pressure	Tensile		
		min ⁻¹	V m³/h	kW	V	A	°	No.	+°C	mm	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
🔥F300 3 phase motor, 50 Hz, protection class IP54																	
B AVD 800/4 3 kW F300	02352	1440	30020	3.0	400	6.15	*	776	40 / 300	211	89	EVS-SD 001	04586	SDD 5	1924	SDZ 5	01925
B AVD 800/4 4 kW F300	02353	1450	31480	4.0	400	8.03	*	776	40 / 300	228	98	EVS-SD 001	04586	SDD 5	1924	SDZ 5	01925
B AVD 800/4 5,5 kW F300	02354	1460	37300	5.5	400	10.40	*	776	40 / 300	267	126	EVS-SD 002	04585	SDD 5	1924	SDZ 5	01925
B AVD 800/4 7,5 kW F300	02355	1460	42400	7.5	400	13.90	*	776	40 / 300	305	135	EVS-SD 003	04584	SDD 5	1924	SDZ 5	01925
🔥F300 Pole-switching, 2 speed (Dahlander winding Δ/Δ), 3 phase motor, 50 Hz, protection class IP54																	
B AVD 800/8/4 0,7/2,8 kW F300	02356	690/1410	14440/28880	0.7/2.8	400	2.41/6.01	*	777	40 / 300	211	89	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1/3,8 kW F300	02357	710/1440	15330/30660	1.0/3.8	400	2.75/8.26	*	777	40 / 300	228	98	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1,3/5 kW F300	02358	730/1440	17960/35920	1.3/5.0	400	3.50/10.4	*	777	40 / 300	267	128	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1,8/7,2 kW F300	02359	725/1430	20855/41710	1.8/7.2	400	4.64/14.4	*	777	40 / 300	305	140	on demand		SDD 5	1924	SDZ 5	01925
🔥F400 3 phase motor, 50 Hz, protection class IP54																	
B AVD 800/4 3 kW F400	02436	1440	30020	3.0	400	6.15	*	776	40 / 400	211	89	EVS-SD 001	04586	SDD 5	1924	SDZ 5	01925
B AVD 800/4 4 kW F400	02437	1450	31480	4.0	400	8.03	*	776	40 / 400	228	103	EVS-SD 001	04586	SDD 5	1924	SDZ 5	01925
B AVD 800/4 5,5 kW F400	02438	1460	37300	5.5	400	10.40	*	776	40 / 400	267	126	EVS-SD 002	04585	SDD 5	1924	SDZ 5	01925
B AVD 800/4 7,5 kW F400	02439	1460	42400	7.5	400	13.90	*	776	40 / 400	305	135	EVS-SD 003	04584	SDD 5	1924	SDZ 5	01925
🔥F400 Pole-switching, 2 speed (Dahlander winding Δ/Δ), 3 phase motor, 50 Hz, protection class IP54																	
B AVD 800/8/4 0,7/2,8 kW F400	02440	690/1410	14440/28880	0.7/2.8	400	2.41/6.01	*	777	40 / 400	211	89	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1/3,8 kW F400	02441	710/1440	15330/30660	1.0/3.8	400	2.75/8.26	*	777	40 / 400	228	103	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1,3/5 kW F400	02442	730/1440	17960/35920	1.3/5.0	400	3.50/10.4	*	777	40 / 400	267	128	on demand		SDD 5	1924	SDZ 5	01925
B AVD 800/8/4 1,8/7,2 kW F400	02443	725/1430	20855/41710	1.8/7.2	400	4.64/14.4	*	777	40 / 400	305	140	on demand		SDD 5	1924	SDZ 5	01925

* The flow volume and pressure increase information is required to determine the pitch angle.

¹⁾ For ventilation operation / smoke extraction (one time 120 min. at 300 °C or 120 min. at 400 °C).