



B AVD 1000




Dimensions B AVD 1000

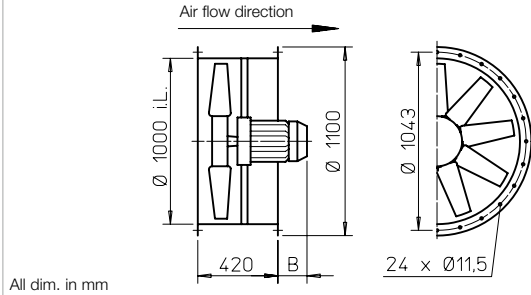

Performance curves B AVD 1000/4

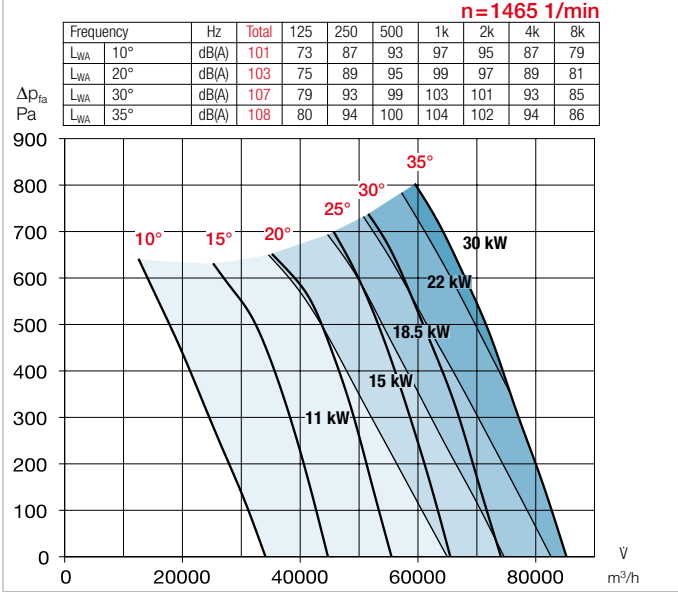

Accessories for B AVD 1000

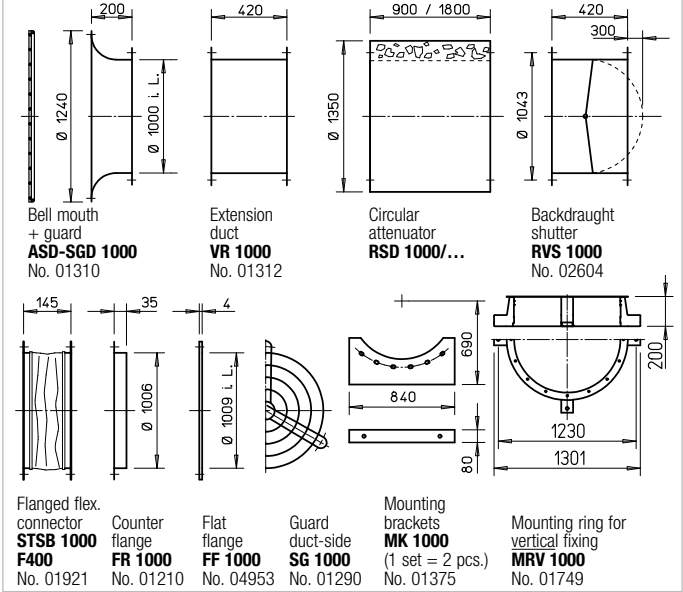

Certification

Certificate of conformity:
F300: 0036-CPR-RG05-03
F400: 0036-CPR-RG05-06

Information

Page

Techn. description	22 ff.
Project planning information	10 ff.
Mounting accessories	160 ff.
Gas warning systems, switch and control technology	170 ff.

Type	Ref. no.	Speed	Air flow volume (FID)	Motor pow. nom. (output)	No-minal voltage	Power consum. nom.	Pitch angle	Wiring diagram	Max. air flow temp. ¹⁾	Dim. B Motor protrusion	Net weight approx.	Pole switch surface-mounted		Anti-vibration mounts NG			
														Pressure	Tensile		
		min ⁻¹	∇ m³/h	kW	V	A	°	No.	+°C	mm	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
🔥F300 3 phase motor, 50 Hz, protection class IP54																	
B AVD 1000/4 11 kW F300	02372	1470	64980	11.0	400	20.9	*	776	40 / 300	383	206	EVS-SD 004	04583	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 15 kW F300	02373	1465	74630	15.0	400	27.9	*	776	40 / 300	427	228	EVS-SD 005	04582	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 18,5 kW F300	02550	1470	82610	18.5	400	35.1	*	776	40 / 300	449	261	EVS-SD 006	04581	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 22 kW F300	02375	1470	85220	22.0	400	41.0	*	776	40 / 300	487	278	EVS-SD 007	04580	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 30 kW F300	02376	1480	85220	30.0	400	57.1	*	776	40 / 300	552	322	EVS-SD 008	04579	SDD 7	01928	SDZ 7	01929
🔥F300 Pole-switching, 2 speed (Dahlander winding YYY), 3 phase motor, 50 Hz, protection class IP54																	
B AVD 1000/8/4 3/11 kW F300	02377	725/1455	32490/64980	3.0/11.0	400	7.0/21.0	*	777	40 / 300	383	205	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 4,3/17 kW F300	02378	730/1475	40190/80380	4.3/17.0	400	12.7/33.4	*	777	40 / 300	449	255	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 5/20 kW F300	02379	730/1470	42610/85220	5.0/20.0	400	14.1/38.6	*	777	40 / 300	487	268	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 6,5/28 kW F300	02380	735/1480	42610/85220	6.5/28.0	400	18.0/52.0	*	777	40 / 300	552	347	on demand		SDD 7	01928	SDZ 7	01929
🔥F400 3 phase motor, 50 Hz, protection class IP54																	
B AVD 1000/4 11 kW F400	02458	1470	64980	11.0	400	20.9	*	776	40 / 400	383	206	EVS-SD 004	04583	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 15 kW F400	02459	01465	74630	15.0	400	27.9	*	776	40 / 400	427	228	EVS-SD 005	04582	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 18,5 kW F400	02611	1470	82610	18.5	400	35.1	*	776	40 / 400	449	261	EVS-SD 006	04581	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 22 kW F400	02461	1470	85220	22.0	400	41.0	*	776	40 / 400	487	276	EVS-SD 007	04580	SDD 6	01926	SDZ 6	01927
B AVD 1000/4 30 kW F400	02462	1480	85220	30.0	400	57.1	*	776	40 / 400	552	322	EVS-SD 008	04579	SDD 7	01928	SDZ 7	01929
🔥F400 Pole-switching, 2 speed (Dahlander winding YYY), 3 phase motor, 50 Hz, protection class IP54																	
B AVD 1000/8/4 3/11 kW F400	02464	725/1455	32490/64980	3.0/11.0	400	7.0/21.0	*	777	40 / 400	383	205	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 4,3/17 kW F400	02465	730/1475	40190/80380	4.3/17.0	400	12.7/33.4	*	777	40 / 400	449	255	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 5/20 kW F400	02466	730/1470	42610/85220	5.0/20.0	400	14.1/38.6	*	777	40 / 400	487	268	on demand		SDD 6	01926	SDZ 6	01927
B AVD 1000/8/4 6,5/28 kW F400	02467	735/1480	42610/85220	6.5/28.0	400	18.0/52.0	*	777	40 / 400	552	347	on demand		SDD 7	01928	SDZ 7	01929

* The flow volume and pressure increase information is required to determine the pitch angle.

¹⁾ For ventilation operation / smoke extraction (one time 120 min. at 300 °C or 120 min. at 400 °C).