


Dimensions B AVD 1120




Dimensions B AVD 1120

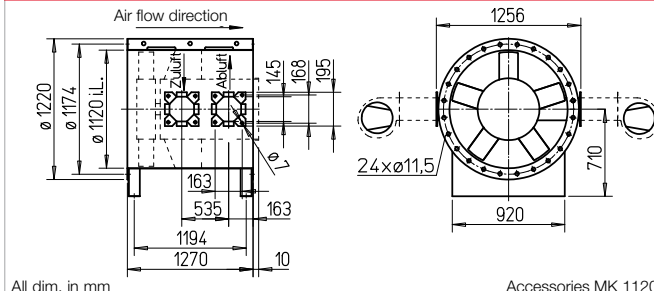


All dim. in mm

Accessories MK 1120

Performance curves B AVD 1120/4

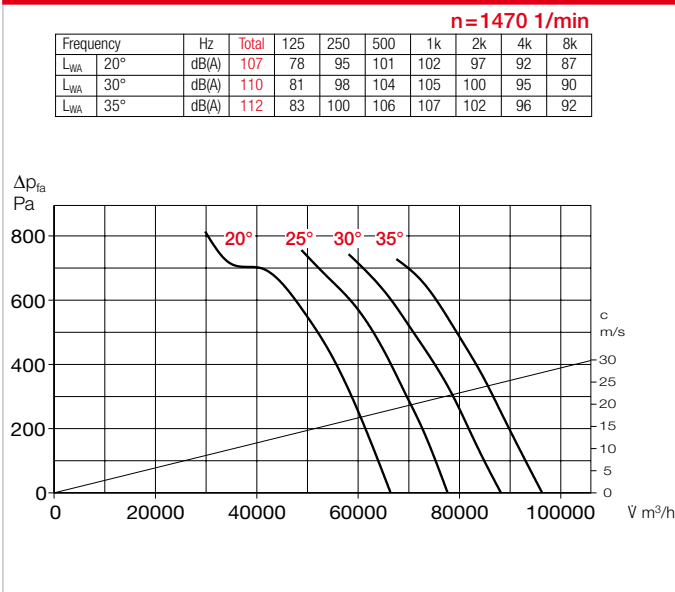

Accessories for B AVD 1120

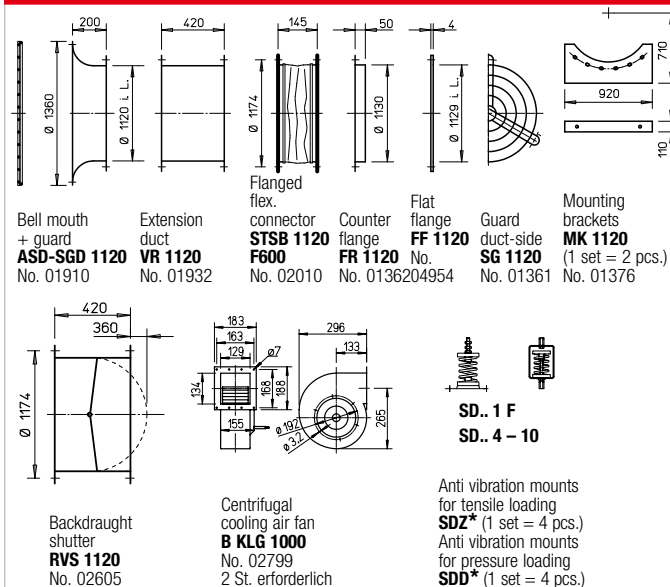

* Type assignment see table, last column

Certification

The smoke and heat exhaust fans B AVD have been tested according to DIN EN 12101-3. Certificate of conformity: F600: 0036-CPR-RG05-04

Information	Page
Techn. description	22 f.
Project planning information	10 ff.
Accessory details	
Mounting accessories	160 ff.
Centrif. cooling air fan	162
Gas warning systems, switch and control technology	170 ff.

Type	Ref. no.	Speed	Air flow volume (FID)	Motor pow. nom. (output)	Nominal voltage	Power consum. nom.	Pitch angle	Wiring diagram	Max. air flow temp. ¹⁾	Dim. B Motor protrusion	Net weight approx.	Pole switch surface-mounted	Anti-vibration mounts NG				
													Pressure		Tensile ²⁾		
		min ⁻¹	Ų m³/h	kW	V	A	°	No.	+°C	mm	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
 3 phase motor, 50 Hz, protection class IP54																	
B AVD 1120/4-20 F600	02885	1470	66180	18.5	400	35.10	20	776	600	—	446	EVS-SD 033	04554	SDD 7	01928	SDZ 7	01929
B AVD 1120/4-25 F600	02886	1470	77390	22.0	400	41.0	25	776	600	—	468	EVS-SD 034	04552	SDD 7	01928	SDZ 7	01929
B AVD 1120/4-30 F600	02887	1480	88180	30.0	400	57.10	30	776	600	—	504	EVS-SD 035	04551	SDD 7	01928	SDZ 7	01929
B AVD 1120/4-35 F600	02888	1480	97370	37.0	400	66.80	35	776	600	10	645	EVS-SD 036	04550	SDD 8	01930	SDZ 8	01931

¹⁾ Smoke extraction (one time 120 min.). ²⁾ Types SDZ not permitted for installation in fire zone.