



B VAR 560 F600




Dimensions B VAR 560 F600

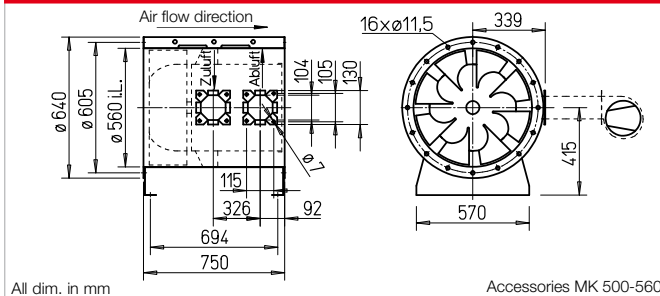

Performance curves B VAR 560/4 F600

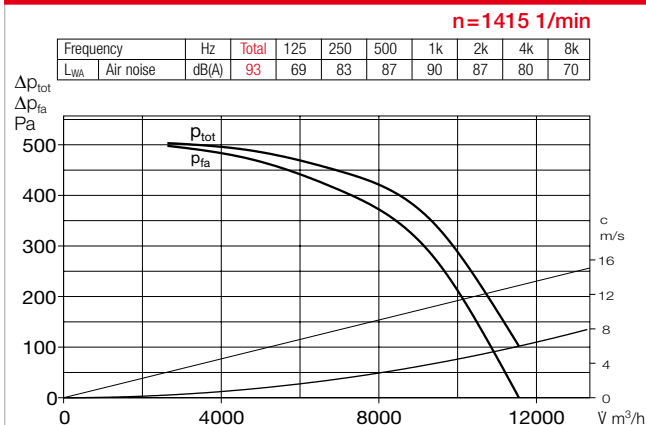

Accessories B VAR 560 F600 Description see page 163 ff.

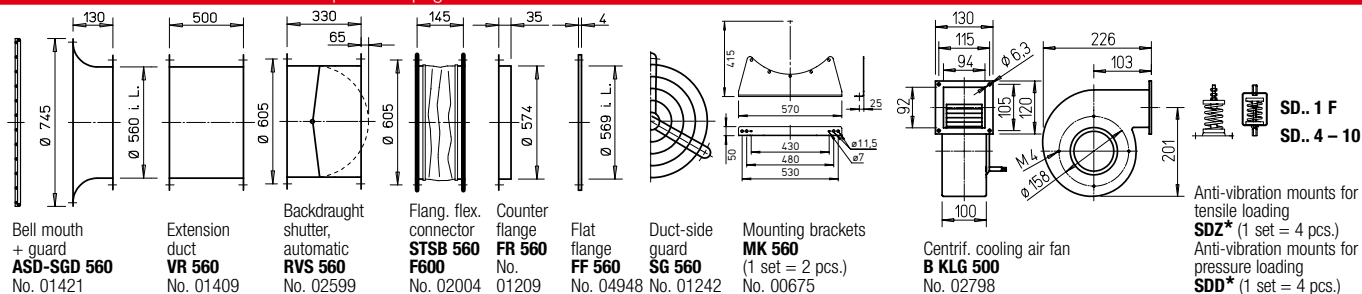

* Type allocation see table, last column

■ Casing

Duct with flanges on both sides DIN 24155 pt. 3. Welded construction, hot-dip galvanised. Welded guide vane with inner hub for mounting the flange motor, hot-dip galvanised.

■ Impeller

Optimised for high pressure and volume output. Special development with spatially curved hot-dip galvanised steel blades.

■ Motor

Direct through Efficient IE3 three phase motor. Pole-switching fans with IEC standard motor.

Protection class IP55. Insulation class H. External cable with sheathing.

■ Motor protection

All types (except pole-switching) have PTC resistors as standard and must be protected with aa full motor protection device (MSA, Ref. no. 01289). This must be bridged in smoke extraction situation.

■ Installation

Installation in any position. Suitable for installation within and outside of the fire zone.

■ Electrical connection

Standard terminal box (IP54) mounted for installation outside of the fire zone.

■ Safety information

Protection against accidental contact for impeller must be ensured pursuant to DIN EN ISO 13857.

■ Centrifugal cooling air fan

The centrifugal cooling air fan B KLG is a required accessory for ensuring motor cooling. Alternative forced ventilation fan upon request. Minimum cooling air flow rate $V = 340 \text{ m}^3/\text{h}$.

■ Certification

The smoke extraction fans B VARD have been tested according to DIN EN 12101-3. Certificate of performance reliability: F600: 0036-CPR-RG05-02

Information	Page
Techn. description	84 f.
Project planning information	10 ff.
Accessory details	
Mounting accessories	163 ff.
Centrif. cooling air fan	162
Gas warning systems, switch and control technology	170 ff.

Type	Ref. no.	Speed	Output free-blowing	Nom. motor power. (output)	Nominal voltage	Power consump- tion	Wiring diagram	max. air flow temp. ¹⁾	Net weight approx.	Smoke exhaust fan control system incl. full motor protection	Anti-vibration mount ²⁾				
											Pressure		Tensile		
		min ⁻¹	Ų m ³ /h	kW	V	A	No.	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.
 Three phase motor, 50 Hz, protection class IP54															
B VARD 560/4 F600		02828	1440	11470	3.0	400	6.15	776	600	129	EVS-SD 024 04563	SDD 4 01944	SDZ 4	01945	

¹⁾ Smoke extraction (once 120 min.).

²⁾ Types SDZ not permitted for installation within fire zone.