


B IVAD 400 F300/F400



F300 F400

Dimensions B IVAD 400 F300/F400

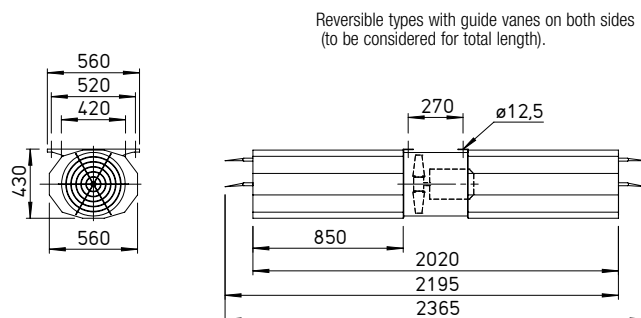

Dim. in mm

Reversible types with guide vanes on both sides
(to be considered for total length).

High-quality, high-performance jet fans with optimal dimensions for minimum space requirement. Suitable for supply and extract ventilation of car parks. Temperature range optional 300 °C/120 min. or 400 °C/ 120 min. (in smoke extraction operation) or 60 °C in permanent operation.

■ Special features

- ☐ Low noise emission.
- ☐ Maximum thrust.
- ☐ Easy and fast to install due to low weight (aluminium construction).
- ☐ Direct driven, axial.
- ☐ Optional 100% reversible (types B IVAD R).

Casing

Duct casing made from corrosion-resistant aluminium with motor support and ceiling suspension

Aerodynamically shaped inlet with guard, outlet nozzle with adjustable guide vane.
reversible types with adjustable guide vanes on both sides (to be considered for total length).

- Impeller

High-performance impeller for unidirectional and reversible operation. Dynamically balanced, quality class 6.3. With flow-optimised blades made from corrosion-resistant aluminium alloy, adjustable in standstill.

Motor

Direct via efficient IE 3 three phase motor. Pole-switching fans with IEC standard motor. Protection class IP55 and temperature-resistant design.

- Motor protection

All types are equipped with PTC resistors from the terminal boxes. Thus, efficient motor protection is possible by means of full motor protection device (type MSA, Ref. no. 01289, Accessories) or FU (Accessories). For the smoke extraction function, all full motor protection devices and speed controllers (FU) for the smoke extraction fan must be bridged to achieve the required output and max. operating duration.

- Noise insulation

Polygon attenuators mounted on both sides, whose aluminium casings are fully lined with abrasion-resistant mineral wool and galvanised perforated plate according to DIN 4102 (non-flammable).

■ Installation

With integrated mounting rails as standard, which are fixed directly to the ceiling using temperature-resistant plugs (Accessories, on-site) at four fixing points.

In order to prevent vibration transmission, the use of anti-vibration mounts is recommended (SDZ, Accessories, see table).

- ☐ **Electrical connection**

Aluminium die-cast terminal box (protection class IP55) as standard, outside on casing.

On-site cabling with temperature-resistant connection cable.

■ Certification

- Structural tolerances according to DIN 2768
Performance measurement according to DIN 24163
 - The jet fans B IVAD have been tested according to DIN EN 12101-3.
- EC certificate of compliance:
F300: 0036-CPR-RG05-15
F400: 0036-CPR-RG05-16

Information	Page
Techn. description	144 f.
Accessory details	Page
Anti-vibration mounts	165
Gas warning systems	170 f.

Type	Ref. no.	Thrust	Discharge speed	Max. output	Nominal speed	Rever-sible	Sound pres-sure level ¹⁾ L _{PA}	Nominal motor power (output)	Nominal motor current		Wiring diagram	Max. air flow temperature	Net weight approx.	Anti-vibration mount (1 set = 4 pcs.)	
		N	m/s	ṽ m³/h	min ⁻¹		dB(A)	kW	A	A	No.	+ °C	kg	Type	Ref. no.
🔥F300 Three phase motor, 400 V, 50 Hz, protection class IP55															
B IVAD 400/2 R F300	04124	60	19.9	9000	2865	Yes	66	2.20	4.4	33.2	776	60/300	62	SDZ 1 F	01943
B IVAD 400/2 F300	04132	65	20.7	9400	2865	No	65	2.20	4.4	33.2	776	60/300	62	SDZ 1 F	01943
🔥F300 Pole-switching, 2 speed, three phase motor, Dahlander winding  , 400 V, 50 Hz, protection class IP55															
B IVAD 400/4/2 R F300	04123	15/60	9.9/19.9	4500/9000	1420/2845	Yes	44/65	0.50/2.20	1.5/4.6	5.4/31.5	777	60/300	62	SDZ 1 F	01943
B IVAD 400/4/2 F300	04131	17/65	10.4/20.8	4700/9400	1420/2845	No	44/66	0.50/2.20	1.5/4.6	5.4/31.5	777	60/300	62	SDZ 1 F	01943
🔥F400 Three phase motor, 400 V, 50 Hz, protection class IP55															
B IVAD 400/2 R F400	04140	60	19.9	9000	2865	Yes	66	2.20	4.43	33.2	776	60/400	63	SDZ 1 F	01943
B IVAD 400/2 F400	04148	65	20.7	9400	2865	No	65	2.20	4.43	33.2	776	60/400	63	SDZ 1 F	01943
🔥F400 Pole-switching, 2 speed, three phase motor, Dahlander winding  , 400 V, 50 Hz, protection class IP55															
B IVAD 400/4/2 R F400	04139	15/60	9.9/19.9	4500/9000	1420/2845	Yes	43/66	0.50/2.20	1.5/4.6	5.4/27.8	777	60/400	63	SDZ 1 F	01943
B IVAD 400/4/2 F400	04147	17/65	10.4/20.7	4700/9400	1420/2845	No	42/65	0.50/2.20	1.5/4.6	5.4/27.8	777	60/400	63	SDZ 1 F	01943

¹⁾ measured in freefield conditions below 45°, at distance of 3 m

2) For ventilation / smoke extraction (one-off 120 min.)