

### Light dome

|              |                |
|--------------|----------------|
| <b>LK 12</b> | Ref. no. 82059 |
| <b>LK 15</b> | Ref. no. 82060 |


Light dome with 300 mm skylight base (500 mm on request) and 24 Volt RWA linear actuator. Opal, 3-skinned (Ug: 1,9 W/(m² K)) light dome design with coloured plastic glazing. Scope of delivery: Skylight, skylight base, linear actuator, hinge bracket and piston slide bracket.

Light dome incl. fall-through protection (fall protection):

|                |                |
|----------------|----------------|
| <b>LK-F 12</b> | Ref. no. 40798 |
| <b>LK-F 15</b> | Ref. no. 40799 |

| Type           | Ref. no. | Dimensions in mm |      |     |
|----------------|----------|------------------|------|-----|
|                |          | A i.L            | B    | C   |
| <b>LK 12</b>   | 82059    | 1200             | 1000 | 300 |
| <b>LK 15</b>   | 82060    | 1500             | 1300 | 300 |
| <b>LK-F 12</b> | 40798    | 1200             | 1000 | 300 |
| <b>LK-F 15</b> | 40799    | 1500             | 1300 | 300 |

### LK..

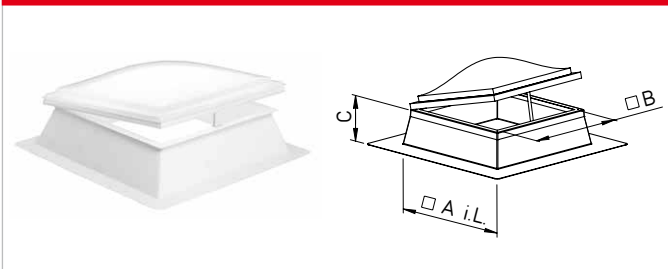


### Multi-leaf damper

#### JVK

Multi-leaf damper JVK: Designed in square frame casing with connection flanges made from galvanised sheet steel on both sides. Airtight connection to frame casing. Installation only with horizontal slat position.

| Type               | Ref. no. | Dimensions in mm |      |      |     |     |
|--------------------|----------|------------------|------|------|-----|-----|
|                    |          | A                | B    | C    | D   | E   |
| <b>JVK 60/60</b>   | 01066    | 600              | 640  | 620  | Ø 9 | 120 |
| <b>JVK 70/70</b>   | 01067    | 700              | 740  | 720  | Ø 9 | 120 |
| <b>JVK 80/80</b>   | 01068    | 800              | 840  | 820  | Ø 9 | 120 |
| <b>JVK 90/90</b>   | 01069    | 900              | 940  | 920  | Ø 9 | 120 |
| <b>JVK 100/100</b> | 01074    | 1000             | 1040 | 1020 | Ø 9 | 120 |

### JVK

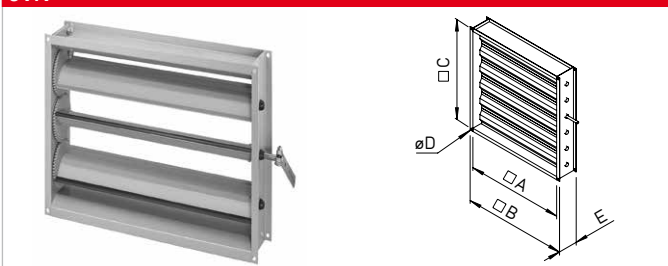


### Multi-leaf damper

#### JKG 70/50

Multi-leaf damper JKG 70/50 with mounted aluminium screen. Nom. dim. multi-leaf damp. 700 x 500 mm. Nom. dim. screen 880 x 555 mm. Depth multi-leaf damper 175 mm. Depth screen 85 mm. Total depth 260 mm. Total weight approx. 18 kg. Leak tightness (EN 1751) Class 2.

| Type             | Ref. no. | Dimensions in mm |     |    |
|------------------|----------|------------------|-----|----|
|                  |          | A                | B   | C  |
| <b>JKG 70/50</b> | 04979    | 931              | 601 | 85 |

### JKG 70/50

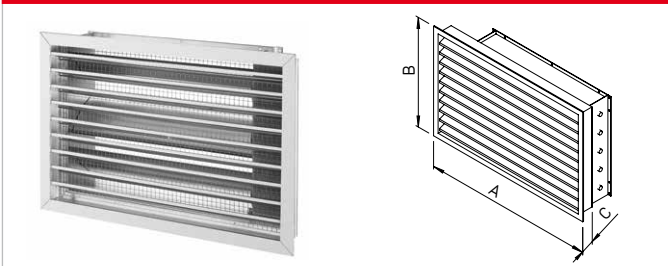

### Bypass control damper

#### BRK 1000x1000

Bypass control damper BRK 1000 x 1000, optional for actively controlled air discharge shafts. Aluminium design incl. 24 V DC drive. Opens and closes within 1.5 seconds. Nominal size BRK 1000 x 1000 m. External dimensions BRK 1287 x 1072 mm. Depth BRK 165 mm. Total weight approx. 23 kg

| Type                 | Ref. no. | Dimensions in mm |      |      |      |     |
|----------------------|----------|------------------|------|------|------|-----|
|                      |          | A                | B    | C    | D    | E   |
| <b>BRK 1000x1000</b> | 37507    | 1000             | 1036 | 1072 | 1287 | 165 |

### BRK 1000x1000



### Damper servo motor

|                      |                |
|----------------------|----------------|
| <b>STM 10 24V 2P</b> | Ref. no. 01075 |
| <b>STM 20 24V 2P</b> | Ref. no. 01093 |
| <b>STM 16 24V S</b>  | Ref. no. 21112 |

Electrical 24 Volt servo motor with spring return (STM 16 24V S with open-close/3-point) for opening and closing shutters JVK and JKG. Torque 10 und 20 Nm (depending on type).

### Adaption module

**APM** Ref. no. 28735  
Connection of 3-wire actuators to 2-wire pole changing outputs of RDA/TSA controllers. (24 V)

### STM 10 / STM 20 / STM 16

