


AIR1 XC 700



Performance curve AIR1 XC 700

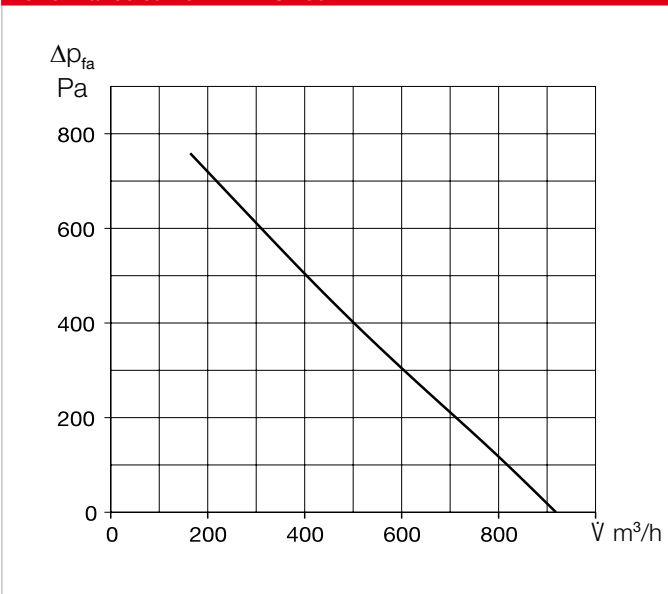

Unit type

	AIR1 XC 700 L	AIR1 XC 700 R
Ref. no.	04331	40116
Heat exchanger	Cross-counterflow	Cross-counterflow

Technical data

Mechanical data	
Area of application	Inside
Installation position	Ceiling
Maintenance access	Side and underside
Min. air volume	315 m ³ /h
Max. air volume ERP	680 m ³ /h ⁽¹⁾
Max. air volume (free blowing)	910 m ³ /h
Weight, unit operational	155 kg
Housing class (DIN 1886)	T2 / TB2 / D2
Filter Outside air	ISO ePM ₁ , 55% (F7) ⁽²⁾
Filter Extract air	ISO ePM ₁₀ 50% (M5) ⁽²⁾
Media temperature (air)	-20 to +50 °C
Ambient temperature (operation)	0 to +50 °C
Protection class	IP31
Electrical data	
Central building control system	BACnet, Modbus TCP/IP
Voltage / Frequency	400 V 3N ~, 50 Hz
Max. output Fans	2 x 170 W
Max. output Elec. pre-heater	2,300 W
Nominal current	
– Ventilation unit	6.4 / 3.4 / 3.7 A ⁽³⁾
– Electrical auxiliary heater	3.3 / 3.3 / 3.3 A ⁽⁴⁾
– max. total	9.7 / 6.7 / 7 A
Connection (wiring diagram no.)	1313


(1) = at 200 Pa external pressure loss ERP-compliant
 (2) = Other filter classes see optional accessories
 (3) = includes electrical pre-heater
 (4) = Optional accessory

Sound data


Sound power level L_{WA} dB(A) at 200 Pa external pressure			
	315 m ³ /h	500 m ³ /h	680 m ³ /h
Supply air (L _{WA})	68	69	72
Extract air (L _{WA})	57	56	57
Outside air (L _{WA})	57	56	58
Exhaust air (L _{WA})	67	67	70
Sound pressure level L_{pA} dB(A) of sound radiated from housing			
	315 m ³ /h	500 m ³ /h	680 m ³ /h
Housing rad. 1 m	36	36	37
Housing rad. 3 m	27	26	28
Housing rad. 5 m	22	22	23

The sound power at the connectors is calculated for the simultaneous operation of both fans. The sound pressure level is determined for the simultaneous operation of both fans at distances of 1.3 and 5 m.

Dimensions AIR1 XC 700 L

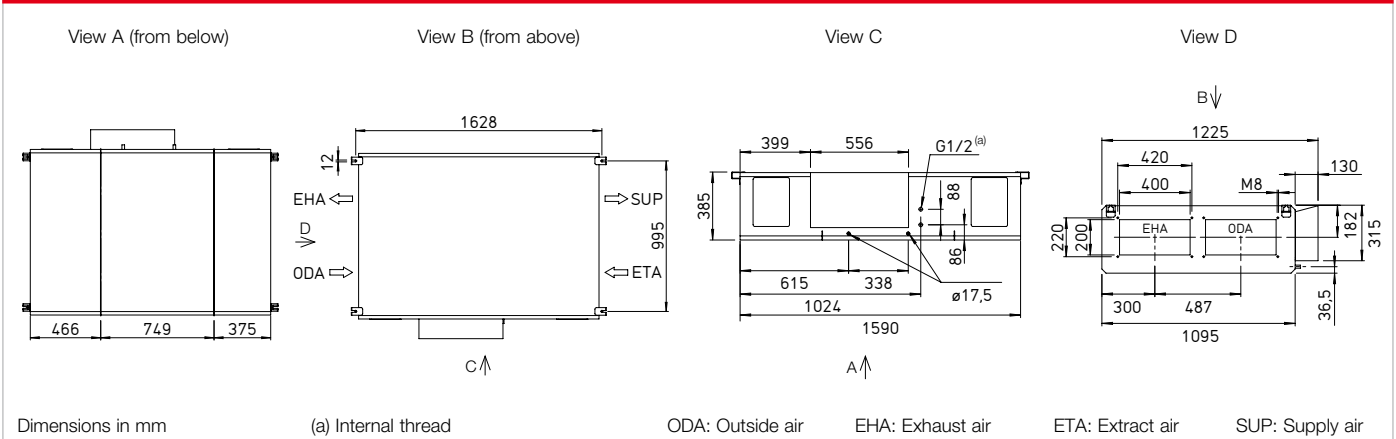

Dimensions AIR1 XC 700 R

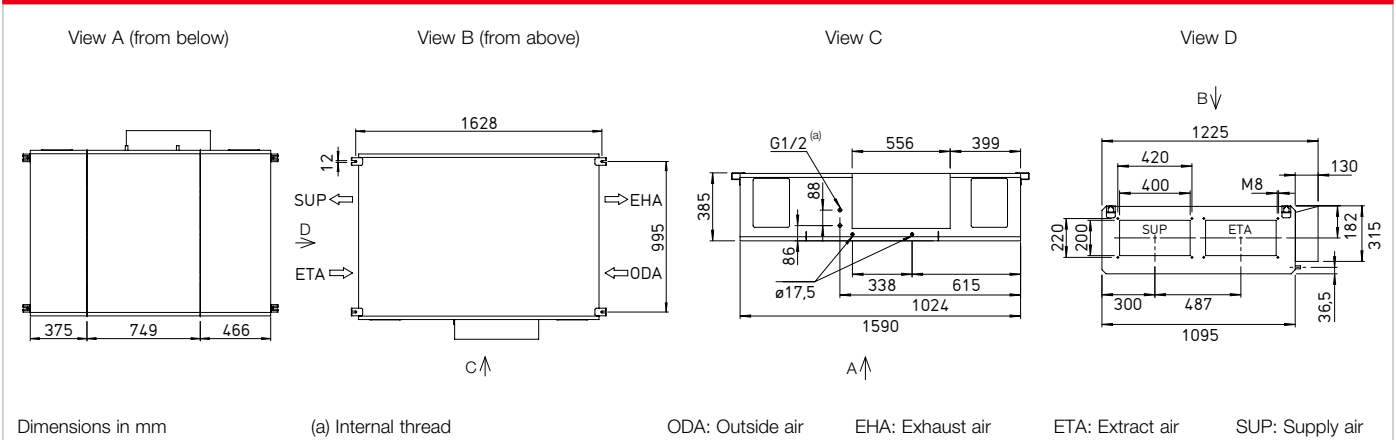

Accessories

Heating and cooling registers

Auxiliary heater		
AIR1-ENH XC 700 Electrical, internal	Ref. no. 03559	Page 30
AIR1-NH WW XC 700 L Hot water, internal	Ref. no. 03659	Page 30
AIR1-NH WW XC 700 R Hot water, internal	Ref. no. 40121	Page 30
Hydraulic unit for hot water heating register		
WHS HE 24 V (0 – 10 V)	Ref. no. 08318	Page 30
Cooling register		
AIR1-KR KW XC 700 L Cold water, external	Ref. no. 04186	Page 31
AIR1-KR KW XC 700 R Cold water, external	Ref. no. 40126	Page 31
AIR1-CO DX XC 700 L Change-over, external	Ref. no. 40365	Page 32
AIR1-CO DX XC 700 R Change-over, external	Ref. no. 40370	Page 32
AIR1-SM DX ⁽¹⁾ Control module	Ref. no. 40408	Page 33

Air routing

Multi-leaf dampers		
AIR1-JVK XC 700	Ref. no. 05841	Page 33
Flexible connector		
AIR1-VS 40/20	Ref. no. 07403	Page 34
Adapter square-round		
AIR1-ÜS XC 700	Ref. no. 04362	Page 34

Condensate drainage

Condensate pump		
AIR1-KP XC 500-1400	Ref. no. 06867	Page 35
Ball siphon		
AIR1-KS D for use with ceiling mounted units and cooling register	Ref. no. 07170	Page 35

Controls

Controllers		
AIR1-BE ECO	Ref. no. 06186	Page 35
AIR1-BE TOUCH	Ref. no. 06187	Page 36
Controller connection cable		
AIR1-SL 4/10 10 m	Ref. no. 07073	Page 36
AIR1-SL 4/20 20 m	Ref. no. 07121	Page 36
Sensors		
AIR1/KWL-VOC 0-10V Mixed gas sensor	Ref. no. 20250	Page 36
AIR1/KWL-CO2 0-10V Carbon dioxide sensor	Ref. no. 20251	Page 36
AIR1/KWL-FTF 0-10V Humidity-temperature sensor	Ref. no. 20252	Page 36
AIR1-CO2 K Carbon dioxide sensor duct	Ref. no. 07124	Page 36
Signal converter for sensors		
AIR1-SK	Ref. no. 06019	Page 37
Extension kit for constant pressure control		
AIR1-CAP	Ref. no. 06756	Page 36

Air filters

Spare air filter and other filter classes		
ELF-AIR1 XC 700/ePM10 50%/96 (M5)	Ref. no. 02172	Page 37
ELF-AIR1 XC 700/ePM1 55%/96 (F7)	Ref. no. 02223	Page 37
ELF-AIR1 XC 700/ePM1 80%/96 (F9)	Ref. no. 02273	Page 37

The use of original spare air filters is mandatory to guarantee the specified technical data and air volumes.

(1) = Necessary accessory in connection with an AIR1-CO DX change-over register for connecting an AIR1 ventilation unit of the XC, XH and RH series to the control of an on-site cooling system.