


AIR1 XC 1400



Performance curve AIR1 XC 1400

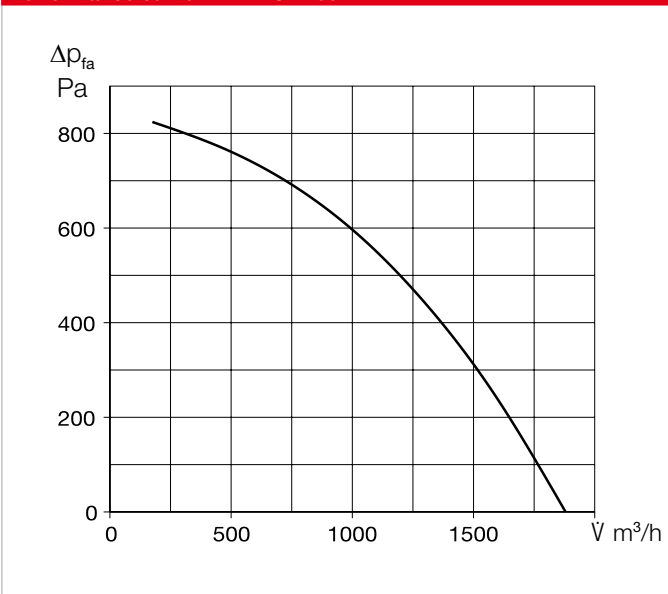

Unit type

	AIR1 XC 1400 L	AIR1 XC 1400 R
Ref. no.	04332	40117
Heat exchanger	Cross-counterflow	Cross-counterflow

Technical data

Mechanical data	
Area of application	Inside
Installation position	Ceiling
Maintenance access	Side and underside
Min. air volume	330 m ³ /h
Max. air volume ERP	1,450 m ³ /h ⁽¹⁾
Max. air volume (free blowing)	1,850 m ³ /h
Weight, unit operational	200 kg
Housing class (DIN 1886)	T2 / TB2 / D2
Filter Outside air	ISO ePM ₁ , 55% (F7) ⁽²⁾
Filter Extract air	ISO ePM ₁₀ 50% (M5) ⁽²⁾
Media temperature (air)	-20 to +50 °C
Ambient temperature (operation)	0 to +50 °C
Protection class	IP31
Electrical data	
Central building control system	BACnet, Modbus TCP/IP
Voltage / Frequency	400 V 3N ~, 50 Hz
Max. output Fans	2 x 500 W
Max. output Elec. pre-heater	4,500 W
Nominal current	
– Ventilation unit	8.7 / 8.7 / 6.8 A ⁽³⁾
– Electrical auxiliary heater	6.5 / 6.5 / 6.5 A ⁽⁴⁾
– max. total	15.2 / 15.2 / 13.3 A
Connection (wiring diagram no.)	1314


(1) = at 200 Pa external pressure loss ERP-compliant
 (2) = Other filter classes see optional accessories
 (3) = includes electrical pre-heater
 (4) = Optional accessory

Sound data


Sound power level L_{WA} dB(A) at 250 Pa external pressure			
	400 m ³ /h	900 m ³ /h	1,450 m ³ /h
Supply air (L _{WA})	71	73	79
Extract air (L _{WA})	58	58	64
Outside air (L _{WA})	58	58	64
Exhaust air (L _{WA})	69	71	77
Sound pressure level L_{pA} dB(A) of sound radiated from housing			
	400 m ³ /h	900 m ³ /h	1,450 m ³ /h
Housing rad. 1 m	40	40	45
Housing rad. 3 m	31	31	36
Housing rad. 5 m	26	26	31

The sound power at the connectors is calculated for the simultaneous operation of both fans. The sound pressure level is determined for the simultaneous operation of both fans at distances of 1.3 and 5 m.

Dimensions AIR1 XC 1400 L

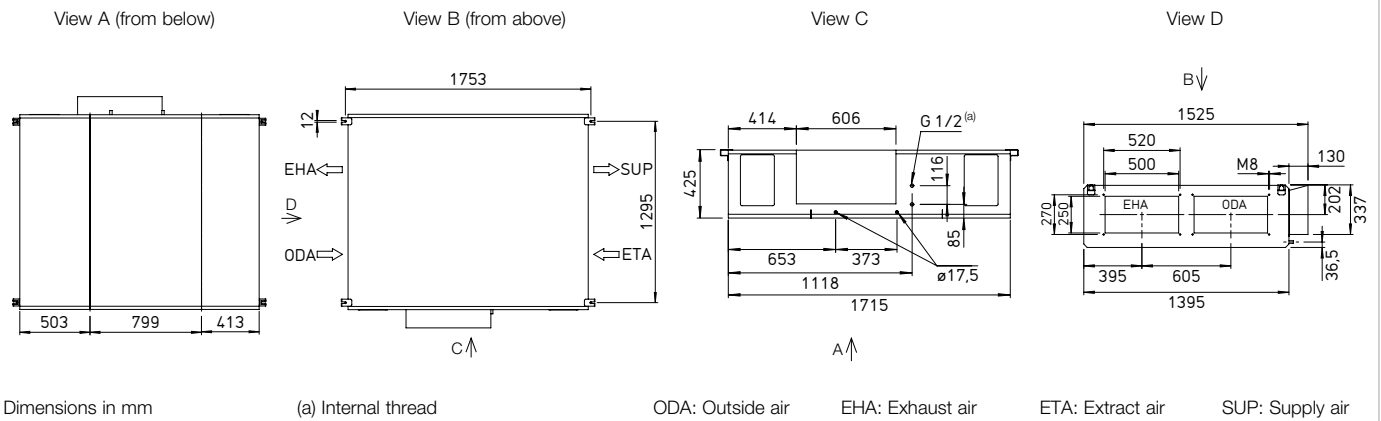

Dimensions AIR1 XC 1400 R

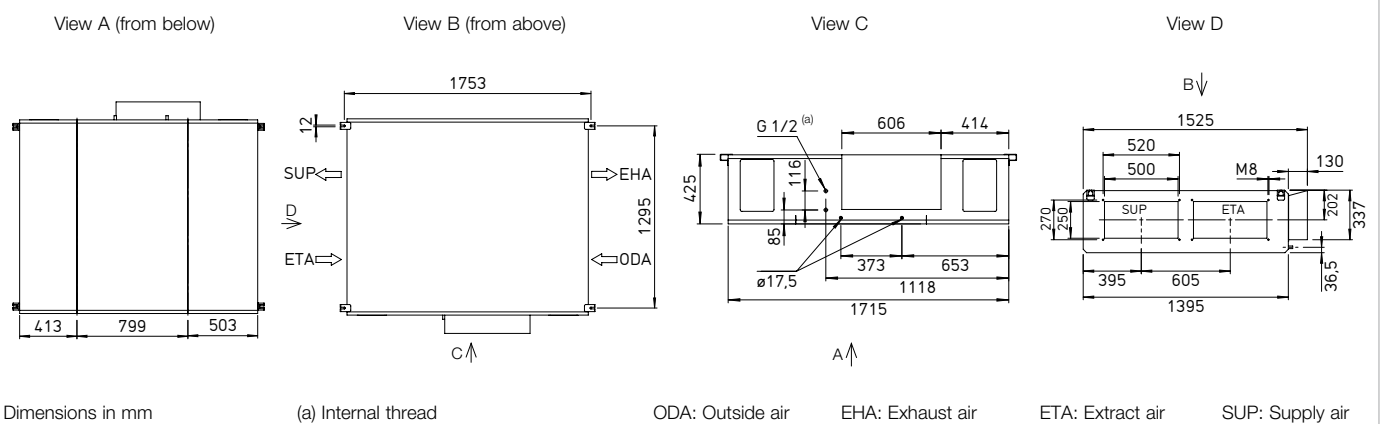

Accessories

Heating and cooling registers

Auxiliary heater

AIR1-ENH XC 1400 Electrical, internal	Ref. no. 03574	Page 30
AIR1-NH WW XC 1400 L Hot water, internal	Ref. no. 03661	Page 30
AIR1-NH WW XC 1400 R Hot water, internal	Ref. no. 40122	Page 30
Hydraulic unit for hot water heating register		
WHS HE 24 V (0 – 10 V)	Ref. no. 08318	Page 30
Cooling register		
AIR1-KR KW XC 1400 L Cold water, external	Ref. no. 04187	Page 31
AIR1-KR KW XC 1400 R Cold water, external	Ref. no. 40127	Page 31
AIR1-CO DX XC 1400 L Change-over, external	Ref. no. 40366	Page 32
AIR1-CO DX XC 1400 R Change-over, external	Ref. no. 40371	Page 32
AIR1-SM DX ⁽¹⁾ Control module	Ref. no. 40408	Page 33

Air routing

Multi-leaf dampers

AIR1-JVK XC 1400	Ref. no. 05856	Page 33
Flexible connector		
AIR1-VS 50/25	Ref. no. 07404	Page 34
Adapter square-round		
AIR1-ÜS XC 1400	Ref. no. 04363	Page 34

Condensate drainage

Condensate pump

AIR1-KP XC 500-1400	Ref. no. 06867	Page 35
Ball siphon		
AIR1-KS D for use with ceiling mounted units and cooling register	Ref. no. 07170	Page 35

Controls

Controllers

AIR1-BE ECO	Ref. no. 06186	Page 35
AIR1-BE TOUCH	Ref. no. 06187	Page 36
Controller connection cable		
AIR1-SL 4/10 10 m	Ref. no. 07073	Page 36
AIR1-SL 4/20 20 m	Ref. no. 07121	Page 36

Sensors

AIR1/KWL-VOC 0-10V Mixed gas sensor	Ref. no. 20250	Page 36
AIR1/KWL-CO2 0-10V Carbon dioxide sensor	Ref. no. 20251	Page 36
AIR1/KWL-FTF 0-10V Humidity-temperature sensor	Ref. no. 20252	Page 36
AIR1-CO2 K Carbon dioxide sensor duct	Ref. no. 07124	Page 36

Signal converter for sensors

AIR1-SK	Ref. no. 06019	Page 37
Extension kit for constant pressure control		
AIR1-CAP	Ref. no. 06756	Page 36

Air filters

Spare air filter and other filter classes

ELF-AIR1 XC 1400/ePM10 50%/96 (M5)	Ref. no. 02173	Page 37
ELF-AIR1 XC 1400/ePM1 55%/96 (F7)	Ref. no. 02224	Page 37
ELF-AIR1 XC 1400/ePM1 80%/96 (F9)	Ref. no. 02274	Page 37

The use of original spare air filters is mandatory to guarantee the specified technical data and air volumes.

(1) = Necessary accessory in connection with an AIR1-CO DX change-over register for connecting an AIR1 ventilation unit of the XC, XH and RH series to the control of an on-site cooling system.