



**GB 400**



Any installation position and location due to five possible outlet directions.


**GB 400 T120**



For the delivery of contaminated, humid and hot air up to max. 120 °C. Motor located outside of air flow.




**Dimensions GB 400**

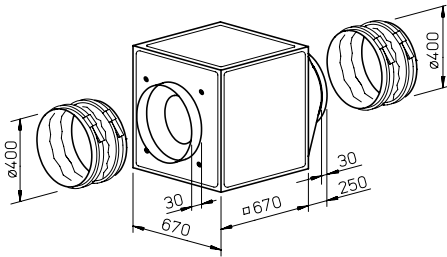

Dim. in mm

**Dimensions GB 400 T120**

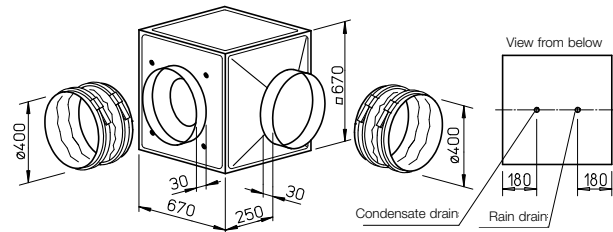

Dim. in mm

**Special features of the GB T120 series**

- Designed for the delivery of contaminated, humid and hot air up to max. 120 °C.
- Motor located outside of air flow.
- Thermally insulated partition between motor and impeller, made of galvanised steel sheet, with 20 mm thick, non-flammable mineral wool.
- Complete motor-impeller unit can be removed without dismantling the system components.
- Inspection cover with handle, easily removable for cleaning and maintenance.
- Condensate tray with condensate drain as standard. Hole provided for rain drain (accessories) for outdoor installation.

**Installation GB T120**

Installation position with condensate drain below. Flexible installation due to three possible centrifugal outlet directions of the outlet fitting. Protected outdoor installation possible with weather protection cover and grille (accessories).

**Special features of the GB series**

Any installation position and flexible installation due to five possible outlet directions of the outlet fitting. The wall bracket (accessories) must be used for wall installation. Protected outdoor installation possible with weather protection cover and grille (accessories).

**Description for both series**

**Casing**

Self-supporting frame construction made of aluminium hollow profiles. Double-walled, 20 mm thick side panels made of galvanised steel sheet, sound and heat insulated by non-flammable mineral wool lining. Nozzle on inlet side for optimal inflow as well as connectors and flexible connecting sleeve (for the respective max. permissible air flow temperature) for duct connection. Moulded part (square to round) on outlet side for low-loss outflow and flexible connecting sleeve to prevent structure-borne noise transmission. Simple positioning with standard crane hook.

**Impeller**

Free-running high performance centrifugal impeller with backward curved plastic blades on galvanised steel plate (aluminium impellers for GB T120), directly driven. Energy-efficient with low noise emission. Dynamically balanced together with the motor in accordance with DIN ISO 21940-11 – quality grade 2.5.


**Drive**

Through maintenance-free, speed-controllable external rotor motor or IEC standard motor in protection category IP54. Ball bearing mounted, radio interference-free.


Type	Max. flow rate	Rated speed	Case-rad. sound pressure	Power consumption	Current consumption		Wiring diagram	Max. air flow temperature at		Weight net appr.	Speed controller 5-step		Mot. prot. circ. break. for connecting built-in thermal contacts				
					at rated voltage	in control mode		Rat. vol.	Control		with motor prot. circuit breaker	without motor prot. circuit breaker	Type	Ref. no.	Type	Ref. no.	
	V m <sup>3</sup> /h	min <sup>-1</sup>	dB(A) in 4m	kW	A	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.	Type	Ref. no.	
<b>Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54</b>																	
GBW 400/4	05513	4680	1400	29	0.51	2.45	3.26	864	60	60	52.0	MWS 5	01949	TSW 5.0	01497	MW <sup>1)</sup>	01579
<b>Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, Y/Δ connection, protection category IP54</b>																	
GBD 400/4/4	05514	4140/4650	1105/1355	28	0.31/0.44	0.51/0.88	0.92	867	60	60	52.0	RDS 2	01315	TSD 1.5	01501	MD	05849
<b>T120 Alternating current, 1~, 230 V, 50 Hz, Capacitor motor, protection category IP54</b>																	
GBW 400/4 T120	05772	4930	1280	40	0.54	2.50	2.50	935	120	100	62.0	MWS 3	01948	TSW 3.0	01496	MW <sup>1)</sup>	01579
<b>T120 Two-speed, three-phase current motor, 3~, 400 V, 50 Hz, Y/Δ connection, protection category IP54</b>																	
GBD 400/4/4 T120	05773	4010/4870	975/1255	40	0.29/0.48	0.50/1.10	1.10	947	120	120	62.0	RDS 2	01315	TSD 1.5	01501	MD	05849

1) Incl. operating switch


**Performance curves GBW 400/4**

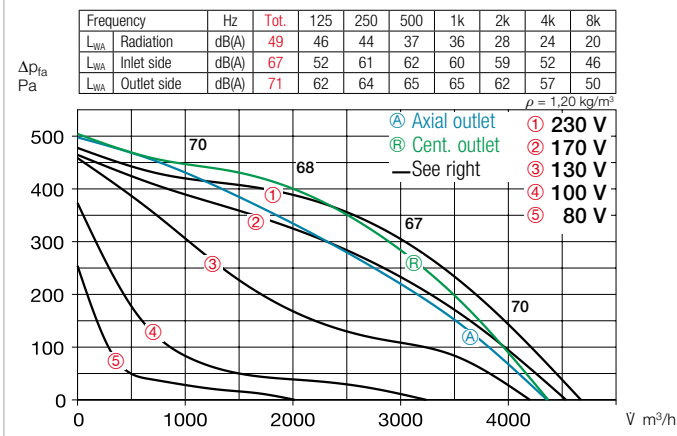


**Performance curves GBD 400/4/4**

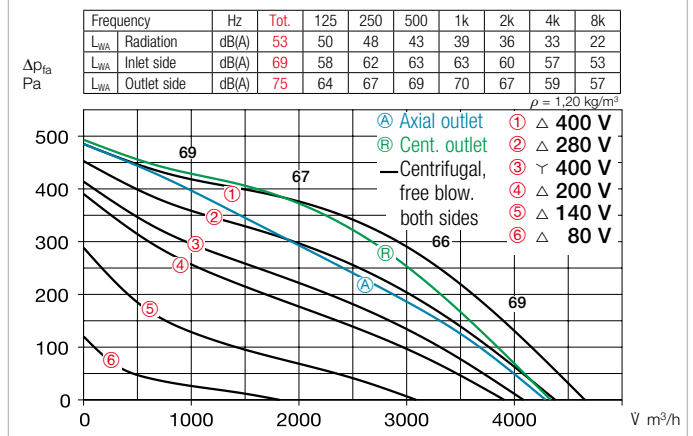

**Performance curves GBW 400/4 T120**

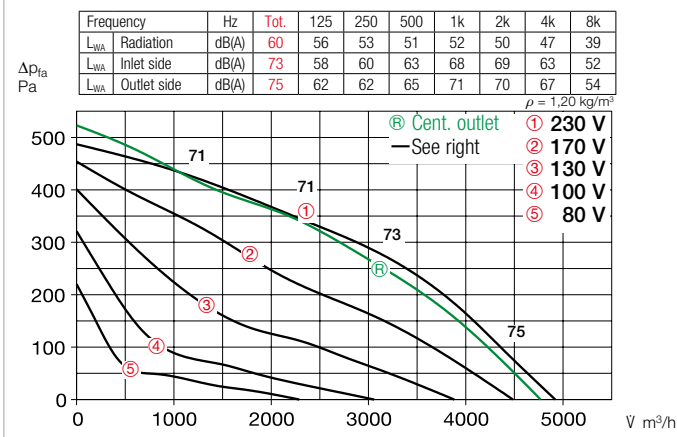

**Performance curves GBD 400/4/4 T120**

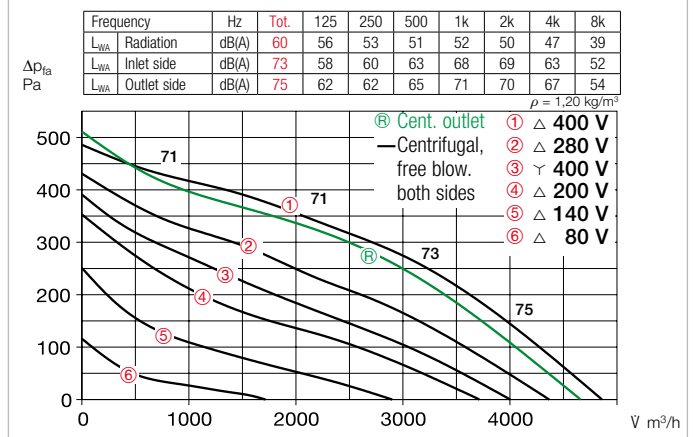

**Electrical connection**

Standard terminal box (IP54) on motor; on the motor support plate for GB T120.

**Motor protection**

With external thermal contacts on the terminal block, which must be wired to the motor protection circuit breaker.

**Power control**

All types are speed-controllable using voltage reduction by means of transformer (accessories). The 3~ types can also be operated at two speeds using a ∇/Δ switch or motor protection circuit breaker M 4. Performance levels are shown in the performance diagram.

**Noise**

The total level and range are specified above the performance diagram for:

- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power

The inlet side sound power level is also specified above the nominal performance curve in the performance diagram.

- The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

**Accessories for both series**

**Vibration dampers** for indoor installation. 1 set = 4 pcs.

**SDD-U** Ref. no. 05627

**Wall bracket** for wall installation.

**GB-WK 400** Ref. no. 05626

**Weather protection grille** for outlet-side coverage.

**GB-WSG 400** Ref. no. 05639

**Weather protection cover** for protected outdoor installation.

**GB-WSD 400** Ref. no. 05748

**Speed switch and on/off switch**

for two-speed ∇/Δ switchable three-phase current fans.

**DS 2<sup>2)</sup>** Ref. no. 01351

<sup>2)</sup> required motor protection circuit breaker: Type MD, No. 05849.

**Special accessories**

for GB series

**Condensate tray** with drain connectors (central) for duct/hose connection.

**GB-KW 400** Ref. no. 05644

(a condensate tray with condensate drain is included in delivery for GB T120).

for GB T120 series

**Rain drain for outdoor installation (Hole in casing base already provided).**

**GB-RA** Ref. no. 09418

References	Page
Planning information	14 ff.
General techn. information, power control	19 ff.
Accessory details	Page
Speed controllers and motor prot. circ. breakers	599 ff.