

ALB EC 200 EH




Efficiency class

B

ALB EC 200 EH



Dimensions ALB EC 200 EH

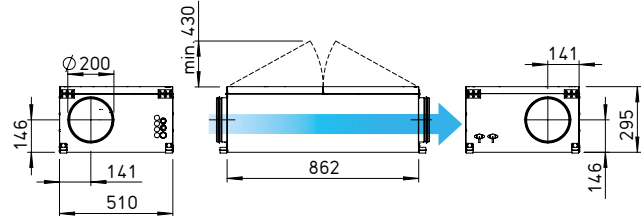

Dim. in mm

Application /Function
 Pleasant indoor climate through the addition of external fresh air which is filtered and automatically heated to the specified temperature.

Operational unit for connection to round duct systems. Suitable for a wide range of applications.

Description / Scope of delivery
 The air filter, fan, heater with controller and electrical terminal box are integrated in a compact flat casing which is thermally and acoustically insulated. Equipped as standard with a continuously variable, electronic heating controller and an external control unit for controlling the unit, as well as a connection cable (10 metres). Air quality, humidity and temperature sensors (see Accessories) can be connected to the electronics in the terminal box to control the specified setpoints.

Casing
 Robust construction made of galvanised steel sheet, 50 mm thick mineral wool lining on all sides, which is also covered with dirt-repellent glass fabric. The cover is easy to open with screw caps and hinge for cleaning purposes. Round duct connectors on inlet side and outlet side with sealing lips, adapted to standard duct Ø. No thermal bridges, smooth surface for easy cleaning.

Filter
 The large filter for long cleaning intervals is freely accessible by opening the casing cover. Standard version ISO ePM_{2.5} 60% (M5). Alternatively, filters with higher classifications ISO ePM₁, 50% (F7) (see accessories) can be used. The volume output reduction must be taken into account. Periodic filter inspection / cleaning is required. Equipment with automatic monitoring DDS (see Accessories) is recommended.

Fan
 The volume flow rate switching is continuously variable with the control unit. Low-noise and high performance centrifugal fan made of galvanised steel sheet. Motor/impeller unit freely accessible for servicing. Drive through energy-saving, speed-controllable EC motor with the highest level of efficiency. Maintenance-free, with lifetime lubricated ball bearings.

Heating element
 Enclosed sheathed heating elements made of stainless steel heat the intake air to the specified setpoint temperature. The electronic pulser continuously variably controls the heat output in constant comparison between the setpoint and the temperature measured by the room or duct sensor.

Turn-off delay
 The unit has a fixed turn-off delay time of approx. 2 minutes if the heating element has been activated.

Electrical connection
 Spacious terminal box inside the casing. Cable entry from the front of the unit through three cable glands and another four holes are provided.

Motor protection
 Deactivation when overheating is imminent. Automatic reactivation after cool down.

Noise
 The total level and range for the case-radiated sound power and outlet side sound power in dB(A) are specified above the performance diagram. In addition, the type table shows the radiated noise and outlet side air noise as sound pressure at 1 m (free field conditions). If necessary, a cross talk silencer (see Accessories) must be integrated in the duct system on site. The radiated noise as sound pressure level at 1 m (free field conditions) is additionally stated in the type table as well as in the table below the performance curve.

Control
 The control element is included in the delivery and offers the following functions:

- Operation with different volume flows.
- Weekly and seasonal timer.
- Temperature control (using room sensor, accessories).
- Control of electronic heating controller. Specification of min./max. temperature.
- Control of an EC extract air fan.
- Display of ambient temperature, outdoor temperature, supply air temperature, fan control and filter contamination (using differential pressure switch, accessories).

Other inputs and outputs:

- Emergency switch contact.
- Boost switch contact.
- Input for air quality or humidity sensor.
- Input for room temperature sensor.





Control element with connection cable (10 m) included in delivery. For flush-mounted installation. Dimensions mm (W x H) 82 x 82

Type	Ref. no.	Flow rate* free blowing	Max. speed	Freq.	Sound pressure level		Prot. category	Voltage	Power consumption	Current consump. max. tot.	Wiring diagram	Max. intake temp.	Weight net appr.
					Case-radiation	Air noise outlet side							
		V m³/h (max.)	min-1	Hz	dB(A) at 1m	dB(A) at 1m		Volt	kW	A	No.	+°C	kg
ALB EC 200 EH	06809	720	2910	50/60	44	66	IP44	400, 3N~	5.12	13.52	SS-1309	40	26

* Volume reduction by approx. 15% when using the filter ISO ePM₁, 50% (F7).

Performance curves ALB EC 200 EH

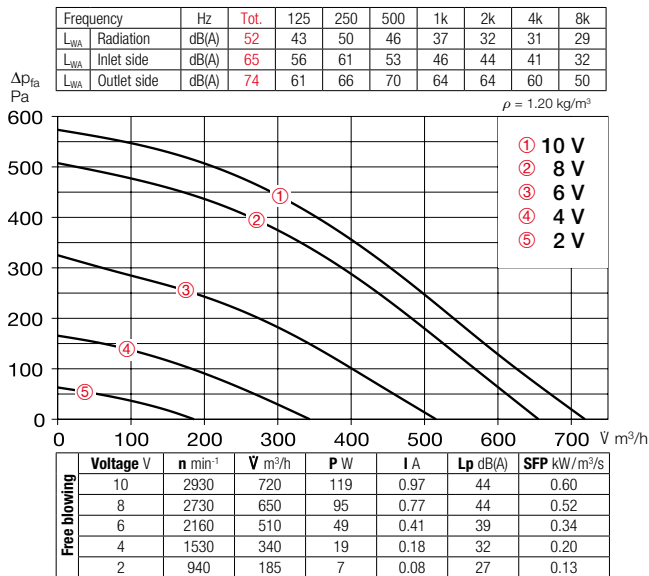

Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM₁, 50%) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference **Page**

Planning information 14 ff.

Other accessories **Page**

Silencers 494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters,
Supply air disc valves 584 ff.

Accessories

Replacement and pollen filter
Large cassette filter for long cleaning intervals.
Unit = 3 pcs.
– Filter class ISO ePM_{2,5} 60% (M5)
ELF-ALB 200 M5 No. 07238
– Filter class ISO ePM₁ 50% (F7)
ELF-ALB 200 F7 No. 07266



Differential pressure switch DDS Ref. no. 00445
Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature TFR-ALB Ref. no. 40000
Room temperature sensor for surface installation.
Temperature range 0 – 30 °C
Protection category IP20
Dim. mm W 86 x H 86 x D 30
Weight approx. 0.1 kg



Flexible cross talk silencer FSD 200 Ref. no. 00679
Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Surface-mounted casing incl. frame ALB-APG Ref. no. 00134
Casing for surface-mounting of control element.
Protection category IP20
Dim. mm W 85 x H 85 x D 48



Duct shutter RSK 200 Ref. no. 05074
Automatic, casing made from galvanized steel.

Supply air disc valve KTVZ 125 Ref. no. 02737
Made of plastic, for low and high flow velocities or resistances.



Supply air disc valve MTVZ 200 Ref. no. 09607
Made of metal, for low and high flow velocities.