

KR EC 400



(Fig. similar)

Designed for the delivery of contaminated air.




SKR EC 400 – sound-insulated



**Lowest noise levels for inlet side and case radiation with high performance density.** Use in extract air and intake air systems with specific noise level requirements.




Dimensions KR EC 400

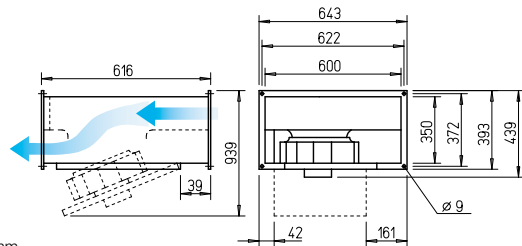

Dim. in mm

Dimensions SKR EC 400 – sound-insulated

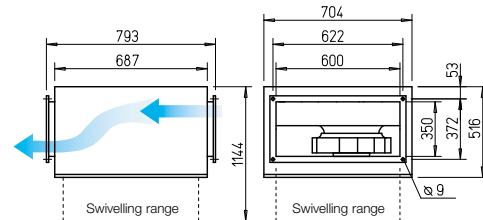

Dim. in mm

Features KR EC and SKR EC

- Highly efficient EC motor for the lowest operating costs.
- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Description

- Casing KR EC**  
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- Casing SKR EC**  
Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Special features SKR EC

- Lowest noise levels for inlet side and case radiation with high performance density.

Common features KR EC and SKR EC

- Impeller**  
Centrifugal, with backward curved blades made of aluminium. Aerodynamically optimised, inlet via nozzle.

Drive

Energy-saving, speed-control-lable external rotor EC motor in protection category IP44 with the highest level of efficiency. Maintenance-free and radio interference-free, ball bearing mounted. Motor and impeller dynamically balanced.

Motor protection

Integrated electronic temperature monitoring system for EC motor and electronics.

Power control

Continuously variable speed control with potentiometer or continuously variable speed regulation with universal control system (see table). Performance levels are shown in the performance curve as an example.

Electrical connection

Terminal box (IP54) mounted to external cable.

Installation

Installation possible in any position. Note accessibility/swivel angle.

Noise

The total level and range are specified above the performance diagram for:


- Case-radiated sound power
- Inlet side sound power
- Outlet side sound power.

The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table and in the table below the performance curve.


Type	Ref. no.	Flow rate Free blowing	Rated speed	Sound press. case-radiation	Power consum.	Current consum.	Wiring diagram	Max. air flow temp.	Wgt net aprx.	Universal control system		Speed potentiometer		
										Type	Ref. no.	Type	Ref. no.	
<b>Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44</b>														
KRW EC 400/60/35	08172	4100	2210	49	0.92	4.03	979	60	24.5	EUR EC <sup>1)2)</sup> 01347	PU 10 <sup>1)</sup>	01734	PA 10 <sup>1)</sup>	01735
<b>Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44</b>														
KRD EC 400/60/35	07591	4580	2510	53	1.30	2.01	1479	60	24.4	EUR EC <sup>1)2)</sup> 01347	PU 10 <sup>1)</sup>	01734	PA 10 <sup>1)</sup>	01735
<b>Sound-insulated SKR EC – Alternating current, 1~, 230 V, 50/60 Hz, EC motor, protection category IP44</b>														
SKRW EC 400/60/35 <sup>3)</sup>	08177	3960	2210	42	0.91	3.96	979	60	42.0	EUR EC <sup>1)2)</sup> 01347	PU 10 <sup>1)</sup>	01734	PA 10 <sup>1)</sup>	01735
<b>Sound-insulated SKR EC – Three-phase current, 3~, 400 V, 50/60 Hz, EC motor, protection category IP44</b>														
SKRD EC 400/60/35	08297	4580	2510	46	1.27	1.98	1479	60	42.0	EUR EC <sup>1)2)</sup> 01347	PU 10 <sup>1)</sup>	01734	PA 10 <sup>1)</sup>	01735

<sup>1)</sup> Multiple EC fans can normally be connected. <sup>2)</sup> alternative electronic diff. pressure/ temperature controller (EDR/ETR, No. 01437/01438) or three level speed switch (SU/SA, No. 04266/04267), see Accessories. <sup>3)</sup> Performance diagram at www.HellosSelect.de.


**Performance curves KRW EC 400/60/35**

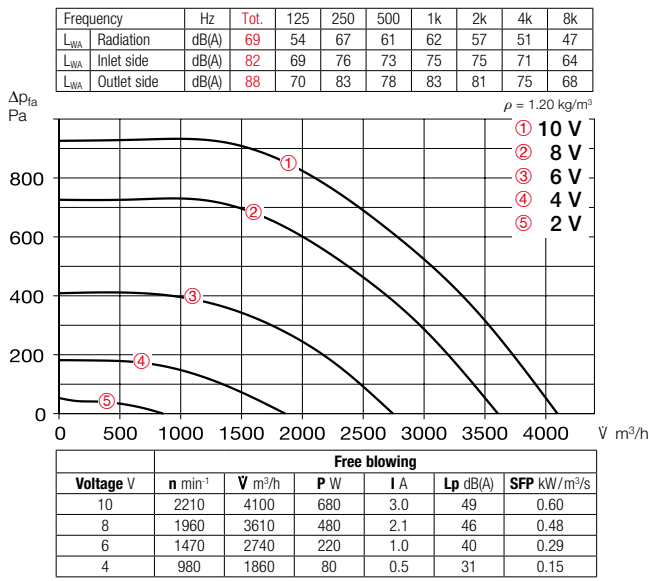

**Performance curves KRD EC 400/60/35**

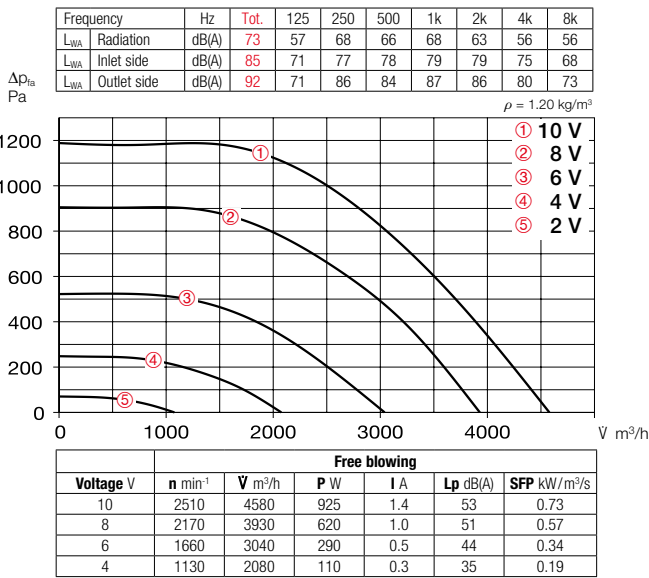

**Performance curves SKRD EC 400/60/35**

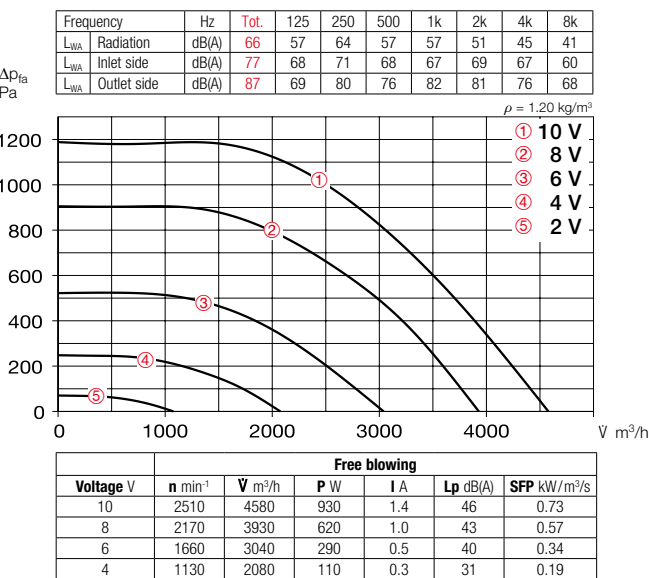

**Accessories**

**External wall shutter**  
**VK 60/35** Ref. no. 00878  
 Automatic overpressure shutter made of light grey plastic.

**Weather protection grille**  
**WSG 60/35** Ref. no. 00113  
 Stable construction made of extruded aluminium profiles, natural colour anodised.

**Multi-leaf damper for rectangular duct installation**  
**JVK 60/35** Ref. no. 06914  
 Frame casing with double-sided flanges, positioning mechanism outside of air flow. Electrical drive see STM, Accessories.

**Fitting**  
**FSK 60/35** Ref. no. 00835  
 For cost-effective integration of rectangular duct fans in round duct systems with Ø 355 mm.

**Flexible connector**  
**VS 60/35** Ref. no. 05698  
 Flexible rectangular duct connector with double-sided flange frame.

**Counter flange**  
**GF 60/35** Ref. no. 06923  
 Flange frame made of galvanised steel sheet for connection to the rectangular duct.

**Rectangular duct silencer**  
**KSD 60/30-35** Ref. no. 08730  
 For outlet and inlet side insertion in the rectangular duct system.

**Rectangular duct air filter**  
**KLF 60/30-35 Coarse 70%\*** 08722  
**KLF 60/30-35 ePM2.5 65%\*** 08646  
 With large bag filter. Galvanised steel sheet casing with double-sided flanges.

**Electric heating element**  
**EHR-K 15/60/30-35** No. 08706  
**EHR-K 30/60/30-35** No. 08707  
 Closed tubular heating element in galvanised steel sheet casing with double-sided connection flanges.

**Temperature control system for electric heating element**  
**EHSD 16** Ref. no. 05003

**Warm water heating element**  
**WHR 2/60/30-35** No. 08786  
**WHR 4/60/30-35** No. 08787  
 For installation in rectangular duct system.

**Temperature control system for warm water heating element**  
**WHS HE<sup>1)</sup>** Ref. no. 08319

<sup>1)</sup> With heat output reduced to 2200 l/h for Type WHR 4/60/30-35.

\* See product page 477 for detailed description.

