


Horiz. outlet RD 710




Vert. outlet VD 710 / T120




Dimensions RD 710

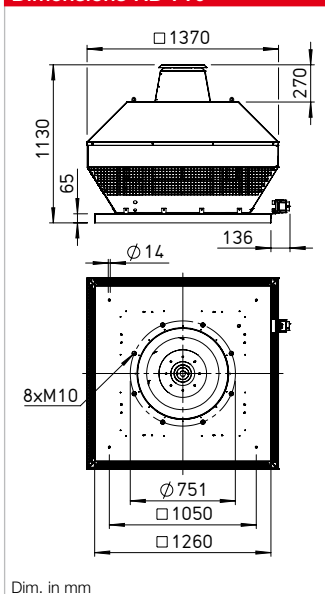

Dimensions VD 710 / T120

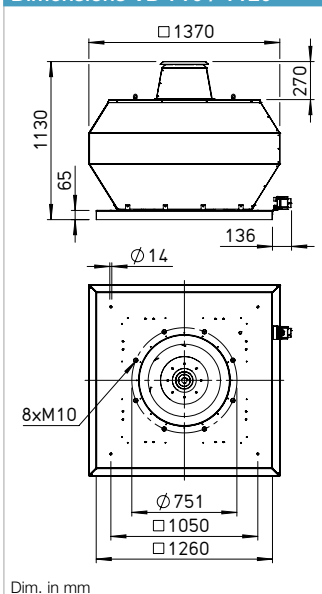

Dimensions Accessories for RD / VD 710*

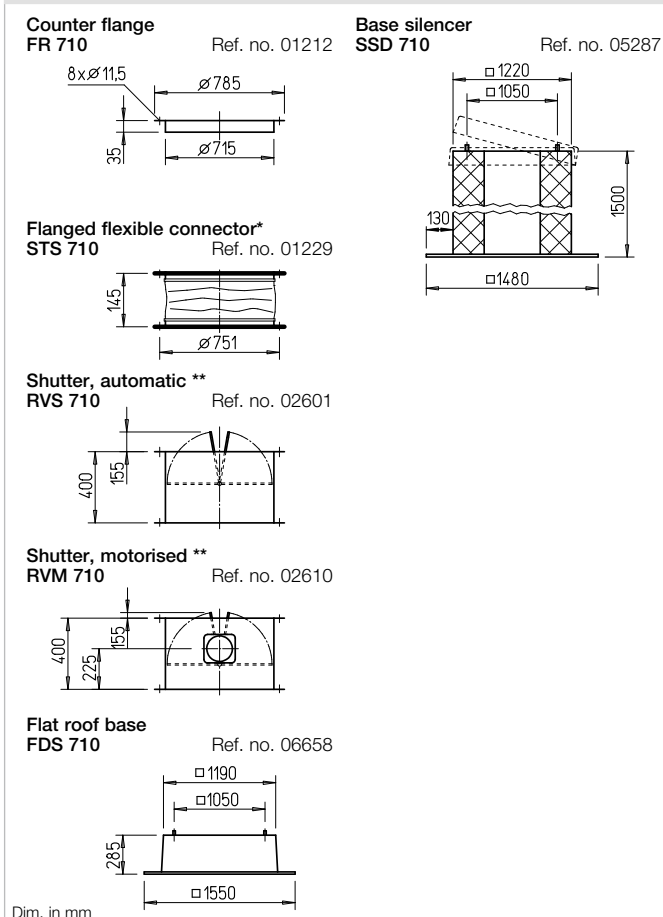

* Accessories VD T120 see installation accessories p. 563 f. Other accessories upon request.

** When used directly under FDS or SSD, an intermediate piece is required (VR 710 K Ref. no. 01429).

Description RD

Horizontal outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD

Vertical outlet roof fan with efficiency-optimised aluminium casing and newly developed high-performance centrifugal impeller.

Description VD T120

Designed for the delivery of process air up to +120 °C. Enclosed motor located outside of the air flow. Compliant with VDI 2052.

Description of all series

■ Casing

Casing made of sea water-resistant aluminium with integrated tamper protection. Motor support plate and base plate with inlet nozzle made of galvanised steel. Base plate with threaded screws for attachment of inlet-side accessories (hole pattern according to DIN 24155).

■ Impeller

High-performance centrifugal impeller with backward curved blades made of aluminium. Dynamically balanced according to DIN ISO 21940-11 – quality grade 6.3.

■ Drive

Speed-controllable external rotor motor in closed design (IP54). Flange motor with self-ventilation (T120 version) in IP55. Ball bearing mounted with moisture protection. Maintenance-free and radio interference-free.

■ Motor protection

Through built-in thermal contacts or built-in PTC thermistors, which must be connected to a motor protection circuit breaker. Assignment see type table.

■ Electrical connection

No dismantling of casing, to external isolator switch in protection category IP65.

■ Protection grille

On the outlet side as standard according to DIN EN ISO 13857.

■ Power control

All types have continuously variable speed control in the range from 0 – 100 % with a frequency inverter with integrated, all-pole effective sine filter.

■ Delivery

Units are ready-for-connection, fully pre-assembled in the shipping box. Easy positioning due to standard crane hook.

■ Noise

The total level and range are specified above the performance diagram for:

☐ Inlet side sound power


☐ Outlet side sound power.

The horizontally case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

References	Page
Planning information	14 ff.
Technical description	504 f.
Selection table	506 f.
Accessories, details	562 f.
Speed controllers, controllers and switches	603 ff.

Performance curve RDD 710/6


Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Inlet side	dB(A)	83	72	75	75	76	78	72	63
L _{WA} Outlet side	dB(A)	87	72	75	75	76	78	72	63

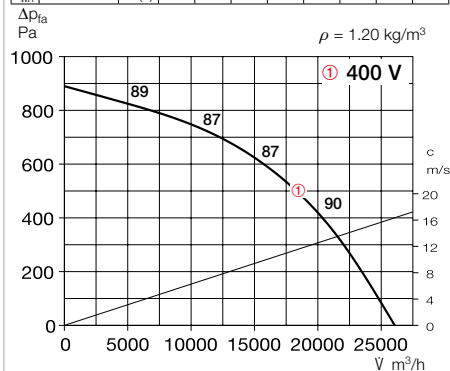

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump.		Wiring diagram	Max. air flow temp.		Weight net	Motor protection circuit breaker	Speed controller 5-step / Frequency inverter	
						at rated voltage	with control		at rated voltage	with control			Type	Ref. no.
		min ⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg			
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54														
RDD 710/6	07460	980	26066	70	4300	9.4	—	1130	50	40	187.0	MSA	01289	FU-BS 16 05463

Performance curve VDD 710/6

Frequency	Hz	Tot.	125	250	500	1k	2k	4k	8k
L _{WA} Inlet side	dB(A)	82	71	74	74	75	77	71	62
L _{WA} Outlet side	dB(A)	86	74	76	79	80	81	73	65

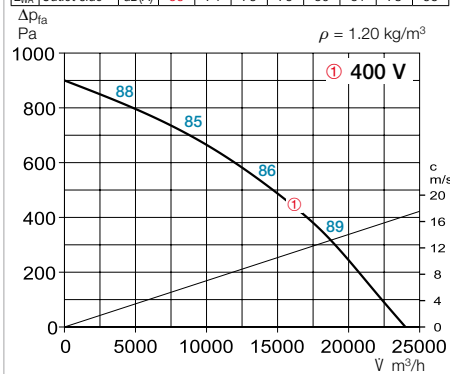

Type	Ref. no.	Speed	Flow rate Free blowing	Noise sound pressure	Power consump.	Current consump.		Wiring diagram	Max. air flow temp.		Weight net	Motor protection circuit breaker	Speed controller 5-step / Frequency inverter		
						at rated voltage	with control		at rated voltage	with control			Type	Ref. no.	Type
		min ⁻¹	m³/h	dB(A) in 4 m	W	A	A	No.	°C	°C	kg	Type	Ref. no.	Type	Ref. no.
Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP54															
VDD 710/6	07458	985	23800	69	4270	9.4	—	1130	60	—	185.0	MSA	01289	FU-BS 16	05463
T120 Three phase current, 3~, 400 V, 50 Hz, Squirrel-cage rotor, Protection category IP55															
VDD 710/6 T120 ¹⁾	07466	985	24536	69	4270	9.4	9.4	1130	106	—	185.0	MSA	01289	FU-BS 16	05463

¹⁾ Performance diagram at www.HeliosSelect.de.